



### Construction

Close-coupled self-priming centrifugal pumps with built-in strainer.  
 Inner basket with Ø 3 mm holes.  
 NMP: version with pump casing and lantern bracket in cast iron, with cataphoresis coating.  
 B-NMP: version with pump casing and lantern bracket in bronze (the pumps are supplied fully painted).

### Applications

For water circulation in swimming pool filtration systems.  
 For clean or slightly dirty water with solids in suspension.

### Operating conditions

Liquid temperature up to 60° C.  
 Ambient temperature up to 40° C.  
 Total suction lift up to 7 m.  
 Maximum permissible working pressure up to 6 bar.  
 Continuous duty.

### Motor

2-pole induction motor, 50 Hz (n ≈ 2900 rpm).  
**NMP:** three-phase 230/400 V ± 10% up to 3 kW;  
 400/690 V ± 10% from 4 to 11 kW;  
**NMPM:** single-phase 230 V ± 10%, with thermal protector.  
 Insulation class F.  
 Protection IP 54.  
**Classification scheme IE3 for three-phase motors from 0,75 kW.**  
 Constructed in accordance with: EN 60034-1; EN 60034-30.  
 EN 60335-1, EN 60335-2-41.


### Materials

Components	NMP	B-NMP
Pump casing	Cast iron	Bronze
Lantern bracket	GJL 200 EN 1561	G-Cu Sn 10 EN 1982
Impeller	Cast iron	Bronze
	GJL 200 EN 1561	G-Cu Sn 10 EN 1982
	Brass P- Cu Zn 40 Pb 2 UNI 5705 for NMP 32/12	
Shaft	Chrome-nickel steel	Cr-Ni-Mo steel
	1.4305 EN 10088 (AISI 303)	1.4401 EN 10088 (AISI 316)
Strainer cover	Cast iron	Bronze
	GJL 200 EN 1561	G-Cu Sn 10 EN 1982
Strainer	Chrome-nickel steel 1.4301 EN 10088 (AISI 304)	
Mechanical seal	Carbon - Ceramic - FPM	

### Special features on request










- Other voltages.
- Frequency 60 Hz (as per 60 Hz data sheet).
- Protection IP 55.
- Special mechanical seal
- Higher liquid or ambient temperatures.

### Coverage chart n ≈ 2900 rpm

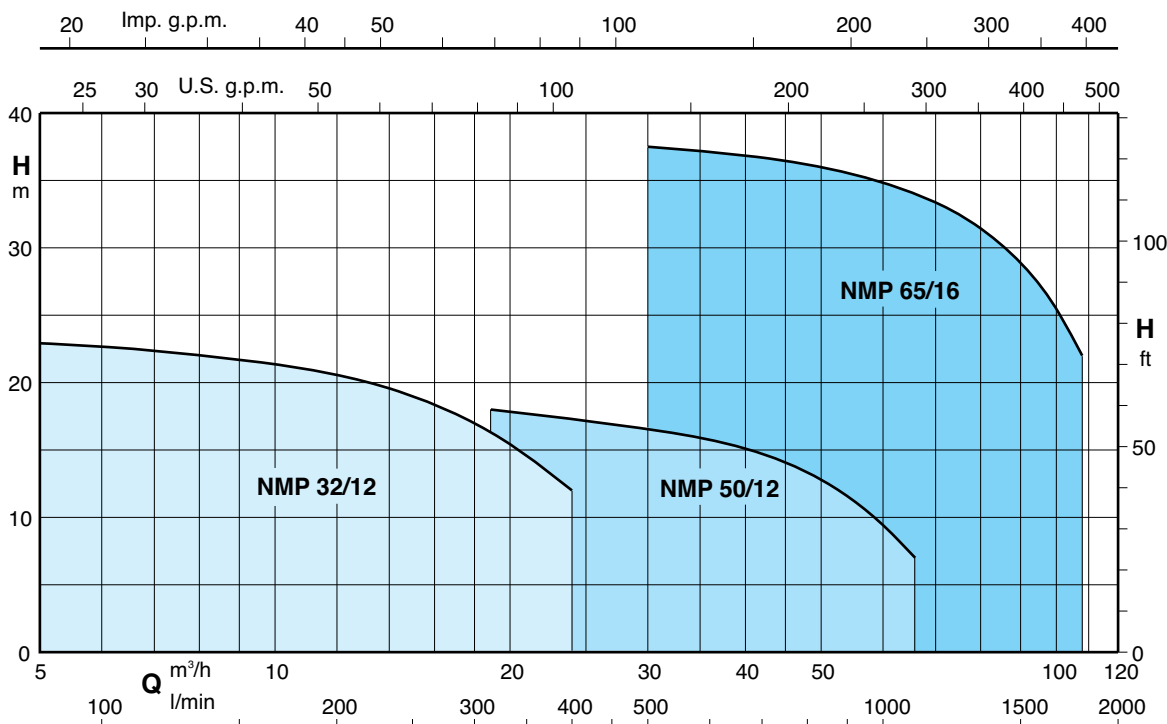




Characteristic curves  $n \approx 2900$  rpm

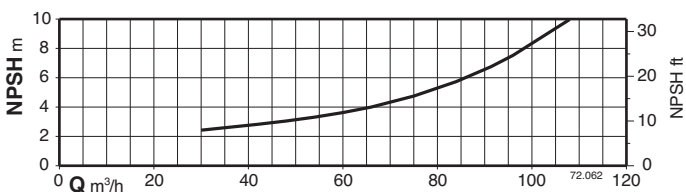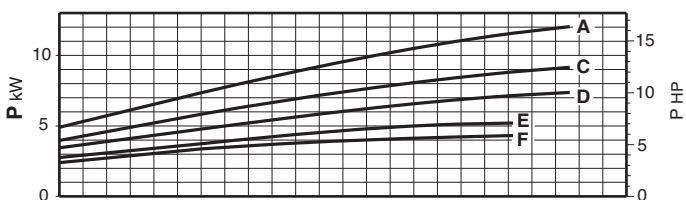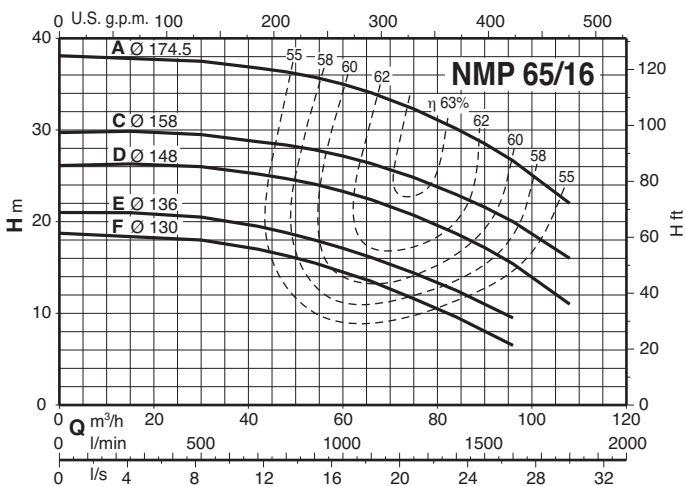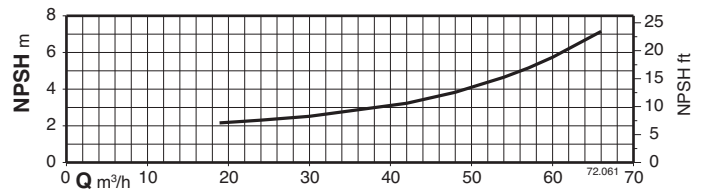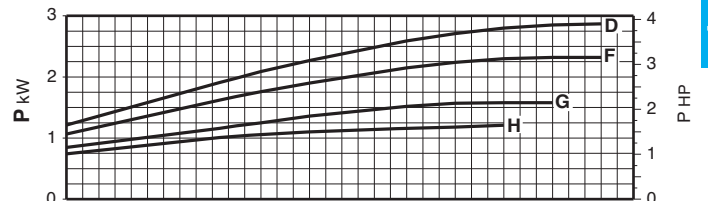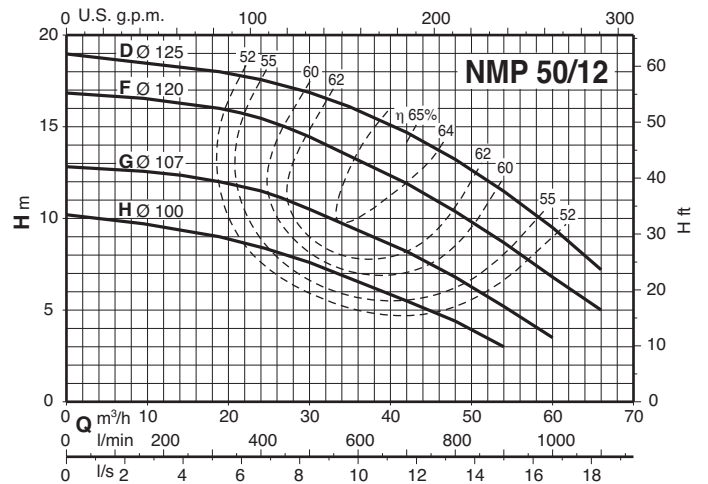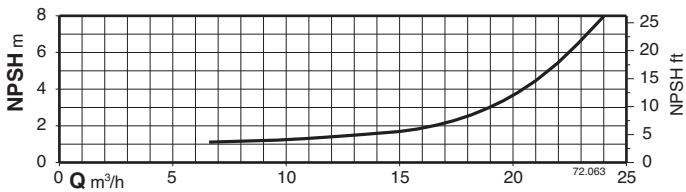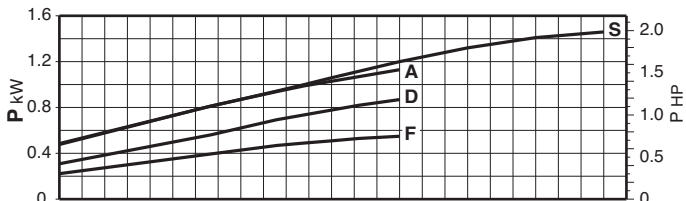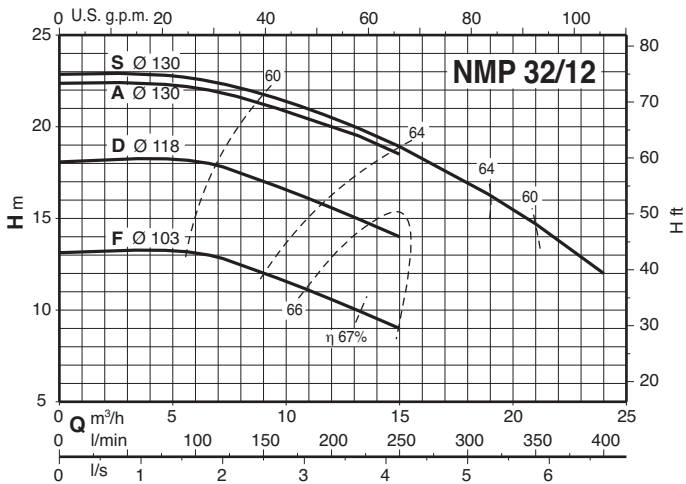

## Features

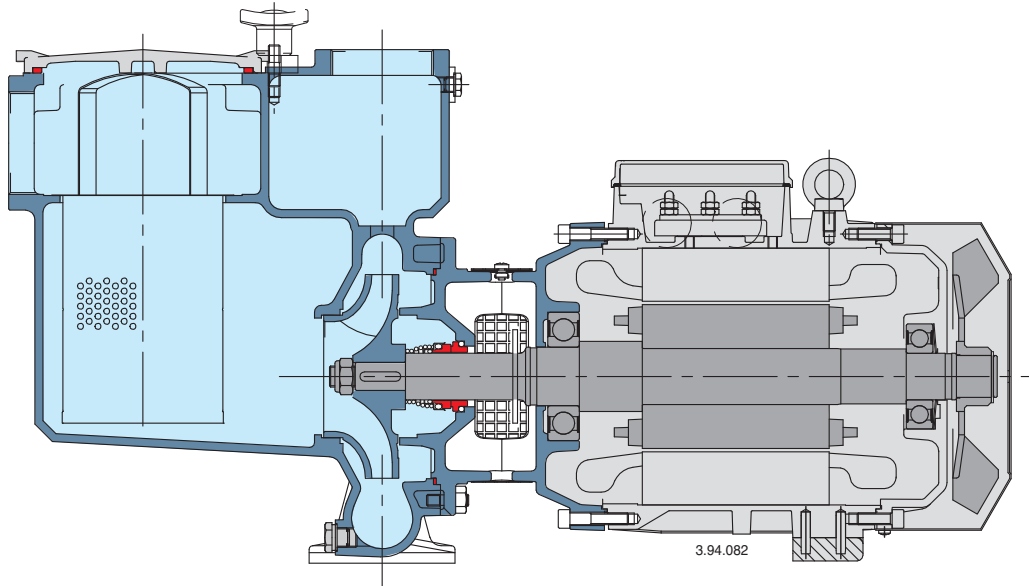

### Flexible

The option to choose between cast iron and bronze materials for the hydraulic parts in contact with the pumped liquid allows NMP series pumps to be selected for use with different types of liquids.

### Stainless steel filter

A large capacity Stainless steel filter is fitted which is easy to remove for inspection and cleaning.

### Exclusive design

An innovative, patented guard prevents contact with rotating parts, providing protection to the end user whilst allowing for inspection of the mechanical seal.

### Reliable

The bearing and shaft are designed to ensure the reduction of the stress, providing high reliability under all operating conditions.