# **RAN**pump

Ran<sup>®</sup> **1/2**" (12.7 mm)


Aluminium Body Diaphragm Pump

## Technical Specifications

Pump Code	AB15-A0	
мах. Flow Rate	60 lpm	
Max. Pump Speed	432 cpm	
Displacement per cycle	0.18 liter	
Fluid Inlet- Outlet Size	1/2" NPT	
Air Inlet Size	1/4"	
мах. Fluid Working Pressure	8 bar	
Max. Air Consumption (at 5 bar)	24 m <sup>3</sup> /h	
Ratio	1:1	

Pump Housing Material	Aluminium
Center Section Material	Polypropylene
Max. Size Pumpable Solids	1.5 mm
Max. Suction Lift	6 m (Wet) 3 m (Dry)
Max. Opreating Tempreture	80 °C
Sound Level	65 dBa (at 5 bar)
Diaphragm Material	Buna-N
Check-Valve Material	Acetal
Weight	3.5 kg

#### Performance Curves

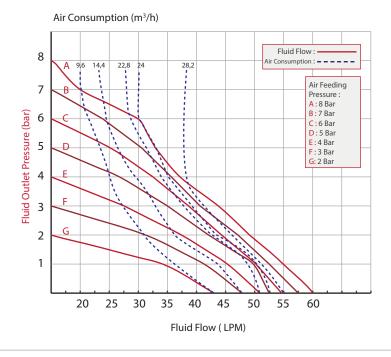

advantage Series for economical solutions...

Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. By using PTFE diaphragm, capacity decreases by 10%. All the values are shown are approximate and not binding.

Example: To pump 35 lpm against a discharge preasure of 4 bar, requires 7 bar and 24 m<sup>3</sup>/h air consumption.

## **Made in Turkey**





# **Dimensions** 195 mm 1/2" NPT All dimensions are in mm. 270 mm 28

1/2" NPT



