## **RAN**pump

Ran<sup>®</sup> **1/2**" (12.7 mm)


Aluminium Body Diaphragm Pump

## **Technical Specifications**

| Pump Code                       | AB15-AS                   |
|---------------------------------|---------------------------|
| Max. Flow Rate                  | 60 lpm                    |
| Max. Pump Speed                 | 432 cpm                   |
| Displacement per cycle          | 0.18 liter                |
| Fluid Inlet- Outlet Size        | 1/2" NPT                  |
| Air Inlet Size                  | 1/4"                      |
| Max. Fluid Working Pressure     | 8 bar                     |
| Max. Air Consumption (at 5 bar) | $24 \text{ m}^3/\text{h}$ |
| Ratio                           | 1:1                       |

| Pump Housing Material     | Aluminium           |
|---------------------------|---------------------|
| Center Section Material   | Polypropylene       |
| мах. Size Pumpable Solids | 1.5 mm              |
| Max. Suction Lift         | 6 m (Wet) 3 m (Dry) |
| Max. Opreating Tempreture | 80 °C               |
| Sound Level               | 65 dBa (at 5 bar)   |
| Diaphragm Material        | TPE                 |
| Check-Valve Material      | Acetal              |
| Weight                    | 3.5 kg              |
|                           |                     |

## Performance Curves

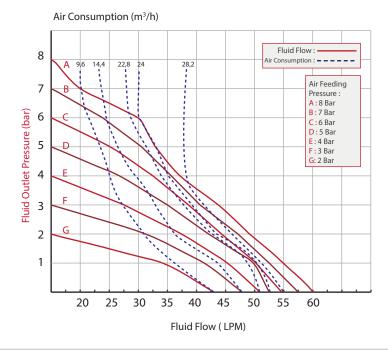

advantage Series for economical solutions...


Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. By using PTFE diaphragm, capacity decreases by 10%. All the values are shown are approximate and not binding.

Example: To pump 35 lpm against a discharge preasure of 4 bar, requires 7 bar and 24 m<sup>3</sup>/h air consumption.

## **Made in Turkey**





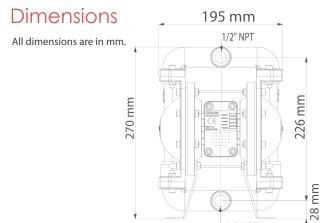

1/2" NPT



