


Ran[®] **1/2**" (12.7 mm)

Polypropylene Body Diaphragm Pump

Technical Specifications

	Pump Code	AB15-P1	Pump Housir
	Max. Flow Rate	60 lpm	Center Section
	Max. Pump Speed	432 cpm	Max. Size Pum
	Displacement per cycle	0.18 liter	Max. Suction L
	Fluid Inlet- Outlet Size	1/2" NPT	Max. Opreatin
	Air Inlet Size	1/4″	Sound Level
	Max. Fluid Working Pressure	8 bar	Diaphragm N
	Max. Air Consumption (at 5 bar)	24 m ³ /h	Check-Valve
	Ratio	1:1	Weight

Performance Curves

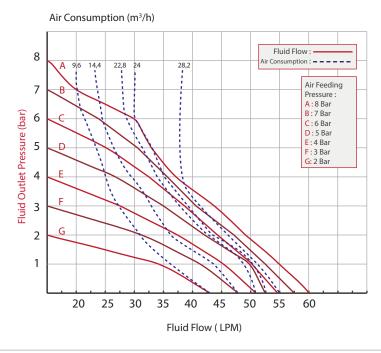



Pump Housing Material	Polypropylene
Center Section Material	Polypropylene
мах. Size Pumpable Solids	1.5 mm
Max. Suction Lift	6 m (Wet) 3 m (Dry)
Max. Opreating Tempreture	80 °C
Sound Level	65 dBa (at 5 bar)
Diaphragm Material	PTFE
Check-Valve Material	PE
Weight	2.7 kg

advantage Series for economical solutions...

Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. By using PTFE diaphragm, capacity decreases by 10%. All the values are shown are approximate and not binding.

Example: To pump 35 lpm against a discharge preasure of 4 bar, requires 7 bar and 24 m³/h air consumption.

Made in Turkey



Dimensions All dimensions are in mm.



