


# Ran<sup>®</sup> **1/2**" (12.7 mm)

Polypropylene Body Diaphragm Pump

## **Technical Specifications**

	Pump Code	AB15-PS	Pump Hou
	Max. Flow Rate	60 lpm	Center See
	Max. Pump Speed	432 cpm	Max. Size P
	Displacement per cycle	0.18 liter	Max. Suctio
	Fluid Inlet- Outlet Size	1/2" NPT	Max. Oprea
	Air Inlet Size	1/4″	Sound Lev
	Max. Fluid Working Pressure	8 bar	Diaphragr
	Max. Air Consumption (at 5 bar)	24 m <sup>3</sup> /h	Check-Val
	Ratio	1:1	Weight

### Performance Curves

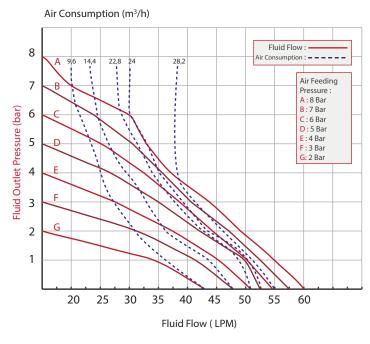



Pump Housing Material	Polypropylene
Center Section Material	Polypropylene
Max. Size Pumpable Solids	1.5 mm
Max. Suction Lift	6 m (Wet) 3 m (Dry)
Max. Opreating Tempreture	80 °C
Sound Level	65 dBa (at 5 bar)
Diaphragm Material	TPE
Check-Valve Material	PE
Weight	2.7 kg

#### advantage Series for economical solutions...

Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. By using PTFE diaphragm, capacity decreases by 10%. All the values are shown are approximate and not binding.

**Example:** To pump 35 lpm against a discharge preasure of 4 bar, requires 7 bar and 24 m<sup>3</sup>/h air consumption.

#### Made in Turkey



