RANpump

Ran[®] 1" (25.4 mm)


Polypropylene Body Diaphragm Pump

Technical Specifications

Pump Code	D25-P3-2
мах. Flow Rate	208 lpm
мах. Pump Speed	280 cpm
Displacement per cycle	0.74 liter
Fluid Inlet- Outlet Size	1" ANSI Flange
Air Inlet Size	3/8"
мах. Fluid Working Pressure	8 bar
Max. Air Consumption (at 5 bar)	1 m ³ /min
Ratio	1:1

Pump Housing Material	Polypropylene
Center Section Material	Polypropylene
мах. Size Pumpable Solids	3 mm
Max. Suction Lift	9.5 m (Wet) 5 m (Dry)
Max. Opreating Tempreture	80 °C
Sound Level	75 dBa (at 5 bar)
Diaphragm Material	Hytrel
Check-Valve Material	Hytrel
Weight	9.1 kg
5	•

Performance Curves

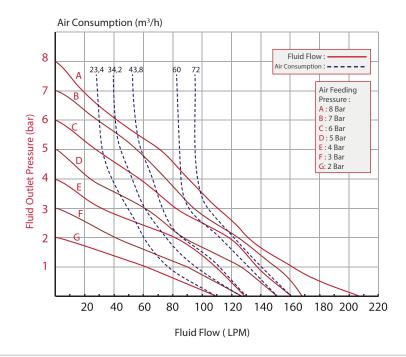

Made in Turkey





Test Conditions: All tests are made with water.
Suction hose submerged in the fluid. Muffler not used.
All the values are shown are approximate and not binding.


Example: To pump 88 lpm against a discharge preasure of 2 bar, requires 5 bar and 43.8 m³/h air consumption.

Dimensions

Α	308
В	507
C	107
D	16
Е	378
F	210
G	198
Н	150
1	11







All dimensions are in mm.