RANpump

Ran[®] **11/2**" (38.1mm)

316 Stainless Steel Body Diaphragm Pump


Technical Specifications

Pump Code	E40M-SC1	
Max. Flow Rate	290 lpm	
The state of the s	= × 0 . p	
мах. Pump Speed	200 cpm	
Displacement per cycle	1.45 liter	
Displacement per eyele	1115 11161	
Fluid Inlet- Outlet Size	1 1/2" NPT	
Air Inlet Size	1/2"	
711111111111111111111111111111111111111	1/2	
мах. Fluid Working Pressure	8 bar	
A: C	4 7 2/ 1	
Max. Air Consumption (at 5 bar)	1.7 m ³ /min	
Ratio	1:1	
	•••	



Pump Housing Material	316 Stainless Steel
Center Section Material	Aluminium
мах. Size Pumpable Solids	4.5 mm
мах. Suction Lift	9.5 m (Wet) 5 m (Dry)
мах. Opreating Tempreture	104 °C
Sound Level	78 dBa (at 5 bar)
Diaphragm Material	PTFE
Check-Valve Material	PTFE
Weight	41 kg

Performance Curves

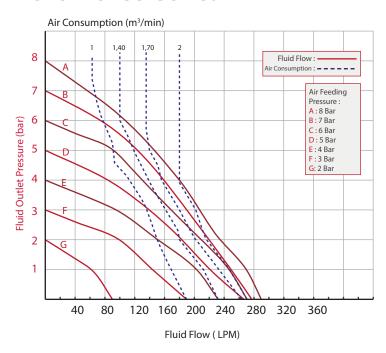

Made in Turkey





Test Conditions: All tests are made with water.
Suction hose submerged in the fluid. Muffler not used.
All the values are shown are approximate and not binding.


Example: To pump 160 lpm against a discharge preasure of 4 bar, requires 7 bar and 1,7 m³/min air consumption.

Dimensions

Α	407
В	402
C	50
D	260.5
Е	490
F	280
G	312
Н	156
	12







All dimensions are in mm.