



Ran[®] 1/2" (12.7 mm)

Aluminium Body Diaphragm Pump




Technical Specifications

Pump Code	B15-A0-2
Max. Flow Rate	70 lpm
Max. Pump Speed	400 cpm
Displacement per cycle	0.18 liter
Fluid Inlet- Outlet Size	1/2" NPT
Air Inlet Size	1/4"
Max. Fluid Working Pressure	8 bar
Max. Air Consumption (at 5 bar)	24 m ³ /h
Ratio	1:1

Pump Housing Material	Aluminium
Center Section Material	Conductive Polypropylene
Max. Size Pumpable Solids	2 mm
Max. Suction Lift	7.5 m (Wet) 3.5 m (Dry)
Max. Operating Temperature	82 °C
Sound Level	65 dBA (at 5 bar)
Diaphragm Material	Buna-N
Check-Valve Material	Buna-N
Weight	3.6 kg

Performance Curves

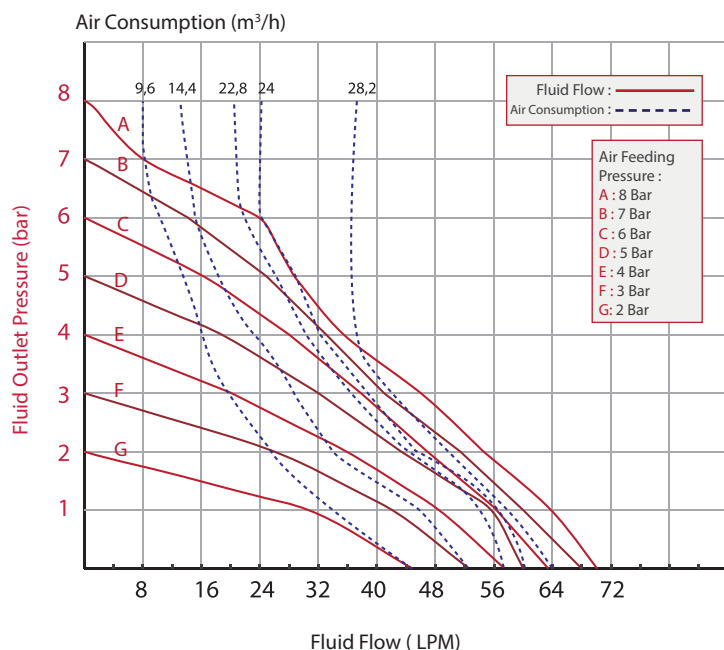

Made in Turkey






ATEX II 2gd IIb t135

Test Conditions: All tests are made with water.
Suction hose submerged in the fluid. Muffler not used.
All the values are shown are approximate and not binding.

Example: To pump 45 lpm against a discharge pressure of 2.7 bar, requires 7 bar and 28.2 m³/h air consumption.

Dimensions

A	194
B	274
C	150
D	220
E	32
F	152
G	100
H	9

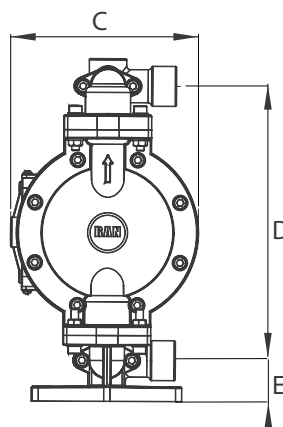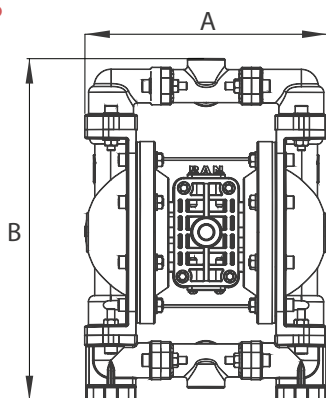

All dimensions are in mm.