

TOE-G Series

*Heat transfer pumps
for heat transfer oils from -30 °C up to 350 °C and hot water up to 160 °C*

*with uncooled mechanical seals
volute casing PN 16
bearing brackets 360 and 470*

Pumps for heat transfer technology

Main applications

- » Tempering in plastics and die cast industry
- » Baking ovens, large frying units as well as in the production of edible oils and dry masses for the food and feedstuff industries
- » Heating calenders and melting pots in the leather and rubber industry
- » Heating stirring and mixing vessels in the production of paints and varnishes
- » Heating tank storage facilities on stationary and FPSE platforms as well as in tankers
- » Heating press lines in the wood and pulp industry
- » Flat glass production
- » Solar power stations and ORC processes

Usage

These pumps are designed for circulating organic or synthetic heat transfer oils in heat transfer plants in acc. with DIN 4754, as well as hot water.

Suitable for media to be pumped with little non-abrasive contaminations

	Thermal oil versions	Hot water versions
Media	Heat transfer oil / thermal oil	Water
T _{min}	- 30 °C	-
T _{max}	+ 350 °C	+ 160 °C, + 180 °C on request
Casing	Spheroidal graphite cast iron	
Nominal pressure	PN 16	
H _{max} (2900 min ⁻¹)	100 m	
Q _{max} (2900 min ⁻¹)	550 m ³ /h	
ATEX	II 3G c TX	

Denomination

Type code Example	TOE-	G	A-	32-	160	/150
Denomination of series						
Mechanical seal						
N = Version with bearing bracket, volute casing ax/top						
A = Close-coupled version with bracket, volute casing ax/top						
I = Close-coupled version with bracket, inline casing						
Nominal width of outlet nozzle DN						
Nominal impeller diameter in mm						
Actual impeller diameter in mm						

Your contacts

**Speck Pumpen
Systemtechnik GmbH**
Regensburger Ring 6 -8
91154 Roth
Tel: +49 9171 809-0
Fax: +49 9171 809-10
info@speck.de
www.speck.de

Roman Tost
M.A., Dipl.-Wirt.-Ing. (FH)
Telefon: +49 (0) 9171 809-264
Fax: +49 (0) 9171 809-10
roman.tost@speck.de

TOE-G Series

	TOE-GN	TOE-GA	TOE-GI
	 <p>Example: Casing with feet</p>	 <p>Example: Casing with centreline mounting</p>	 <p>Height dimension H indicated</p>
Features	<ul style="list-style-type: none"> » Bearing bracket / process design » Base plate » Dismantling of the bearing bracket possible without moving the motor » Alignment / checking of the coupling required before start-up » Pump and aggregate dimensions in acc. with EN 733 	<ul style="list-style-type: none"> » Bracket version » Base plate optional » No alignment of coupling required before start-up » Space for disassembling the cartridge insert required » Pump dimension in acc. with EN 733 	<ul style="list-style-type: none"> » Bracket version with inline casing » No alignment of coupling required before start-up » Space for disassembling the cartridge insert required
Pump dimensions	→ Pages 16 and 17	→ Pages 16 and 17	→ Page 18
Hydraulics and casing	<ul style="list-style-type: none"> » Identical hydraulics for TOE-GN and TOE-GA Characteristic curves → pages 12 and 13 » Identical volute casing for each frame size » Large pumps with centreline mounting and double volute Description → page 5 		<ul style="list-style-type: none"> » Characteristic curves → pages 14 and 15 » Inline casings with two dimensions H available
Sizes	Only two bearing brackets for all sizes <ul style="list-style-type: none"> » Bearing bracket 360 for 12 sizes - identical and interchangeable » Bearing brackets 470 for 7 sizes - identical and interchangeable » Only one bracket per size 		
Description	<ul style="list-style-type: none"> » Thermal oil versions → page 6 » Hot water versions → page 7 		
Interchangeability of parts	<ul style="list-style-type: none"> » Within all series including the versions with magnetic coupling (→ see catalogue TOE-MN/MA/MI series) there is a high degree of interchangeability. » This means minimum spare parts stock and full flexibility as replacing pumps or components or retrofitting to a different design is very easy. » Table of interchangeable parts → page 19 		

High operational safety, optimal design and service-friendly

Robust design

Torsion-resistant casing cover and ball bearings with lifetime lubrication

Wear-resistant SiC sleeve bearings

Solid, hydrodynamically lubricated sleeve bearings made from SiC as tried-and-tested slide material - extremely wear-resistant and good resistance in corrosive media.

Impellers with back vanes

The back vanes of the impellers significantly reduce the axial thrust and therefore remove strain from the mechanical seal and the ball bearings considerably. They also keep dirt particles away from the sleeve bearings.

Optimised for synthetic heat transfer oils

Dry-run safety function for the mechanical seal

Synthetic heat transfer oils are being used more and more frequently due to the benefits they offer. However, low-boilers develop in the synthetic oils over time in form of gas bubbles, can lead to dry-running on the mechanical seal.

This is ruled out completely in the generously designed mechanical seal casings from Speck. An anti-vortex rib reliably prevents gas bubbles from forming on the mechanical seal.

The vacuum generated by the back vanes also ensures that the low-boilers do not collect in the mechanical seal casing and are returned to the media circuit.

Clever temperature management

Optimised cooling of ball bearings, mechanical seal and sleeve bearings

The air flow generated by the fan blade on the coupling cools the mechanical seal and the ball bearing optimally in combination with coupling protection or bracket and several cooling fins. The additional cooling zone reduces the temperature on the sleeve bearings.

Also suitable for critical applications

Mechanical seal with quench

For media, which are prone to crack product formation on the sealing surfaces of the mechanical seal, versions with quench are available.

Optimal design

Energy efficiency

High energy efficiency secures a lasting competitive edge.

Speck offers the important criteria for energy-optimised design: Seamless range of sizes, highly efficient impellers, switching of impellers for the best design at the operating point and natural motors in accordance with IE2.

Maintenance-friendly and flexible

Simple installation

All series are extremely maintenance-friendly thanks to easy-to-remove bearing brackets.

Minimum spare parts stock

The high level of interchangeability of identical parts guarantees minimal spare parts stock requirements and an extremely high level of flexibility.

The bearing bracket 360 alone is used with mechanical seal in all three series in up to twelve sizes.

Retrofitting to a different series is also no problem at all - the volute casing can even be left in the system.

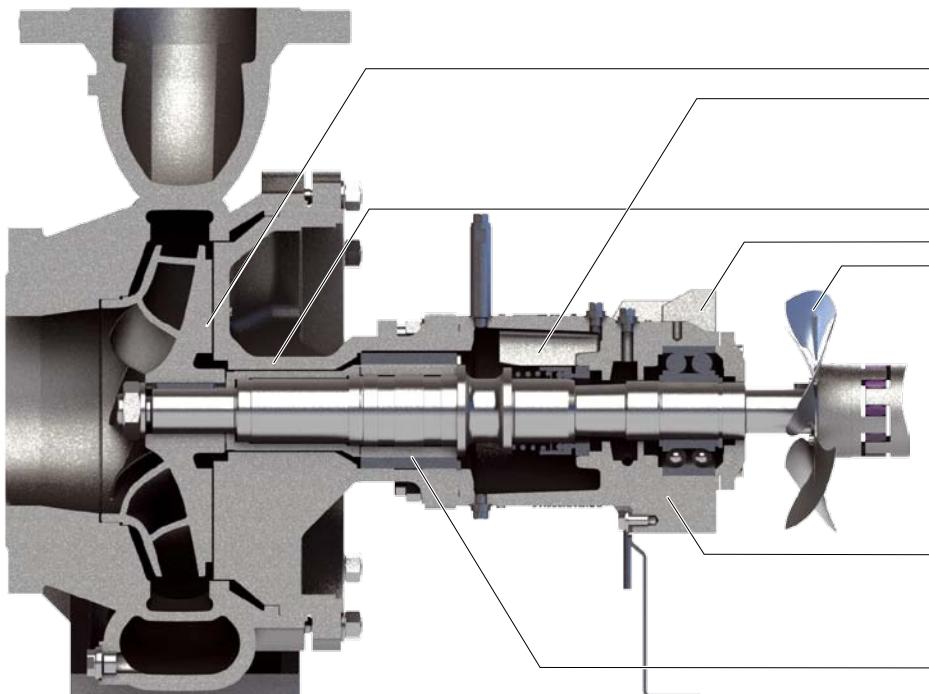



Fig.: TOE-GN, bearing bracket 470, casing with centreline mounting

Longer lifetime

There are effects, which have little or no relevant impact on smaller designs, but lead to increased wear in larger pumps.


Speck offers larger pumps with special designs to guarantee a longer lifetime: Casing with centreline mounting and double volute.

Centreline mounting relieves strain from the bearings and coupling

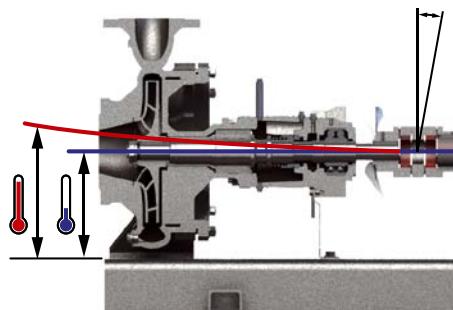

Casing with feet: The larger the pump, the more strain placed on the bearings and coupling by heat expansion

Casings with feet can only expand upwards in high temperatures, which causes the shaft to tilt and bend. This has an impact on the sleeve bearings and shaft coupling in particular. As the heat expansion increases with larger casing size, the sleeve bearings and couplings also wear faster on larger pumps.

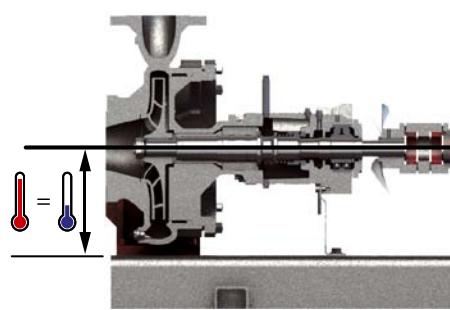


The centreline mounting eliminates the impact of the heat expansion completely

Speck is the only manufacturer to use a centreline mounting for heat transfer pump volute casings, PN 16. It eliminates the impact of vertical expansion completely. The shaft is also always aligned at the optimal height, even in hot operation, and bearings and coupling achieve a significantly higher lifetime.

A double volute remove strain from the sleeve bearings

Radial forces are applied directly on the sleeve bearings. The forces increase with higher impeller diameters and higher speeds. This is why the sleeve bearings on larger pumps with single volute casings wear faster.

Speck therefore uses casings with double volute for larger pumps, which significantly reduce the radial forces. The strain on the radial and axial bearings is considerably reduced, helping them achieve a much longer lifetime.

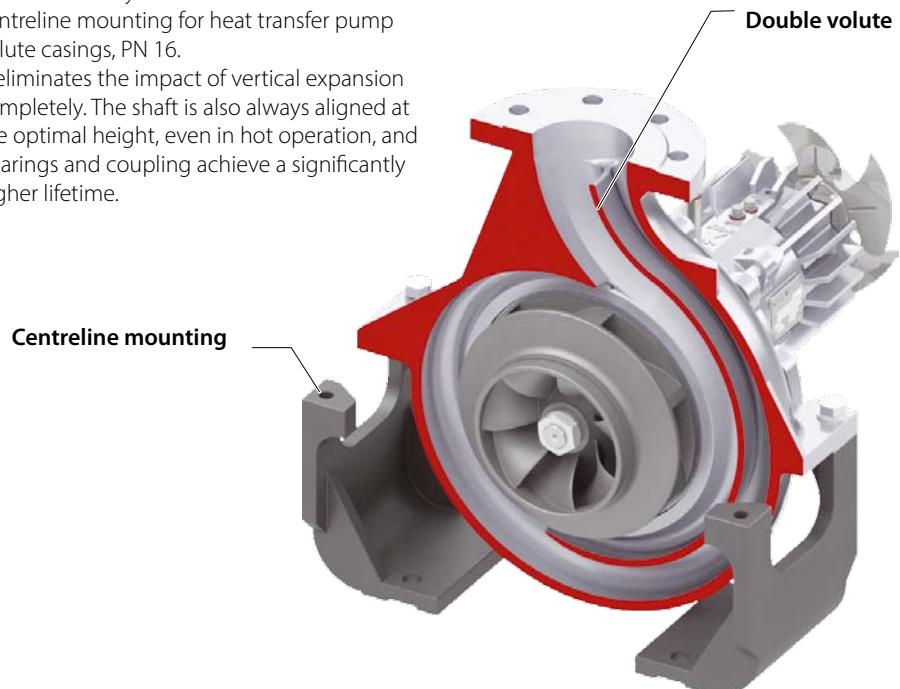

TOE-GN / GA – Sizes and casing designs

32-160	40-160	50-160	65-160	80-160	100-160	-
32-200	40-200	50-200	65-200	80-200	100-200	125-200
32-250	40-250	50-250	65-250	80-250	100-250	-
Bearing bracket 360				Bearing bracket 470		

All casings with dimensions in accordance with EN 733




Casing with double volute



Casing with centreline mounting

Thermal oil versions

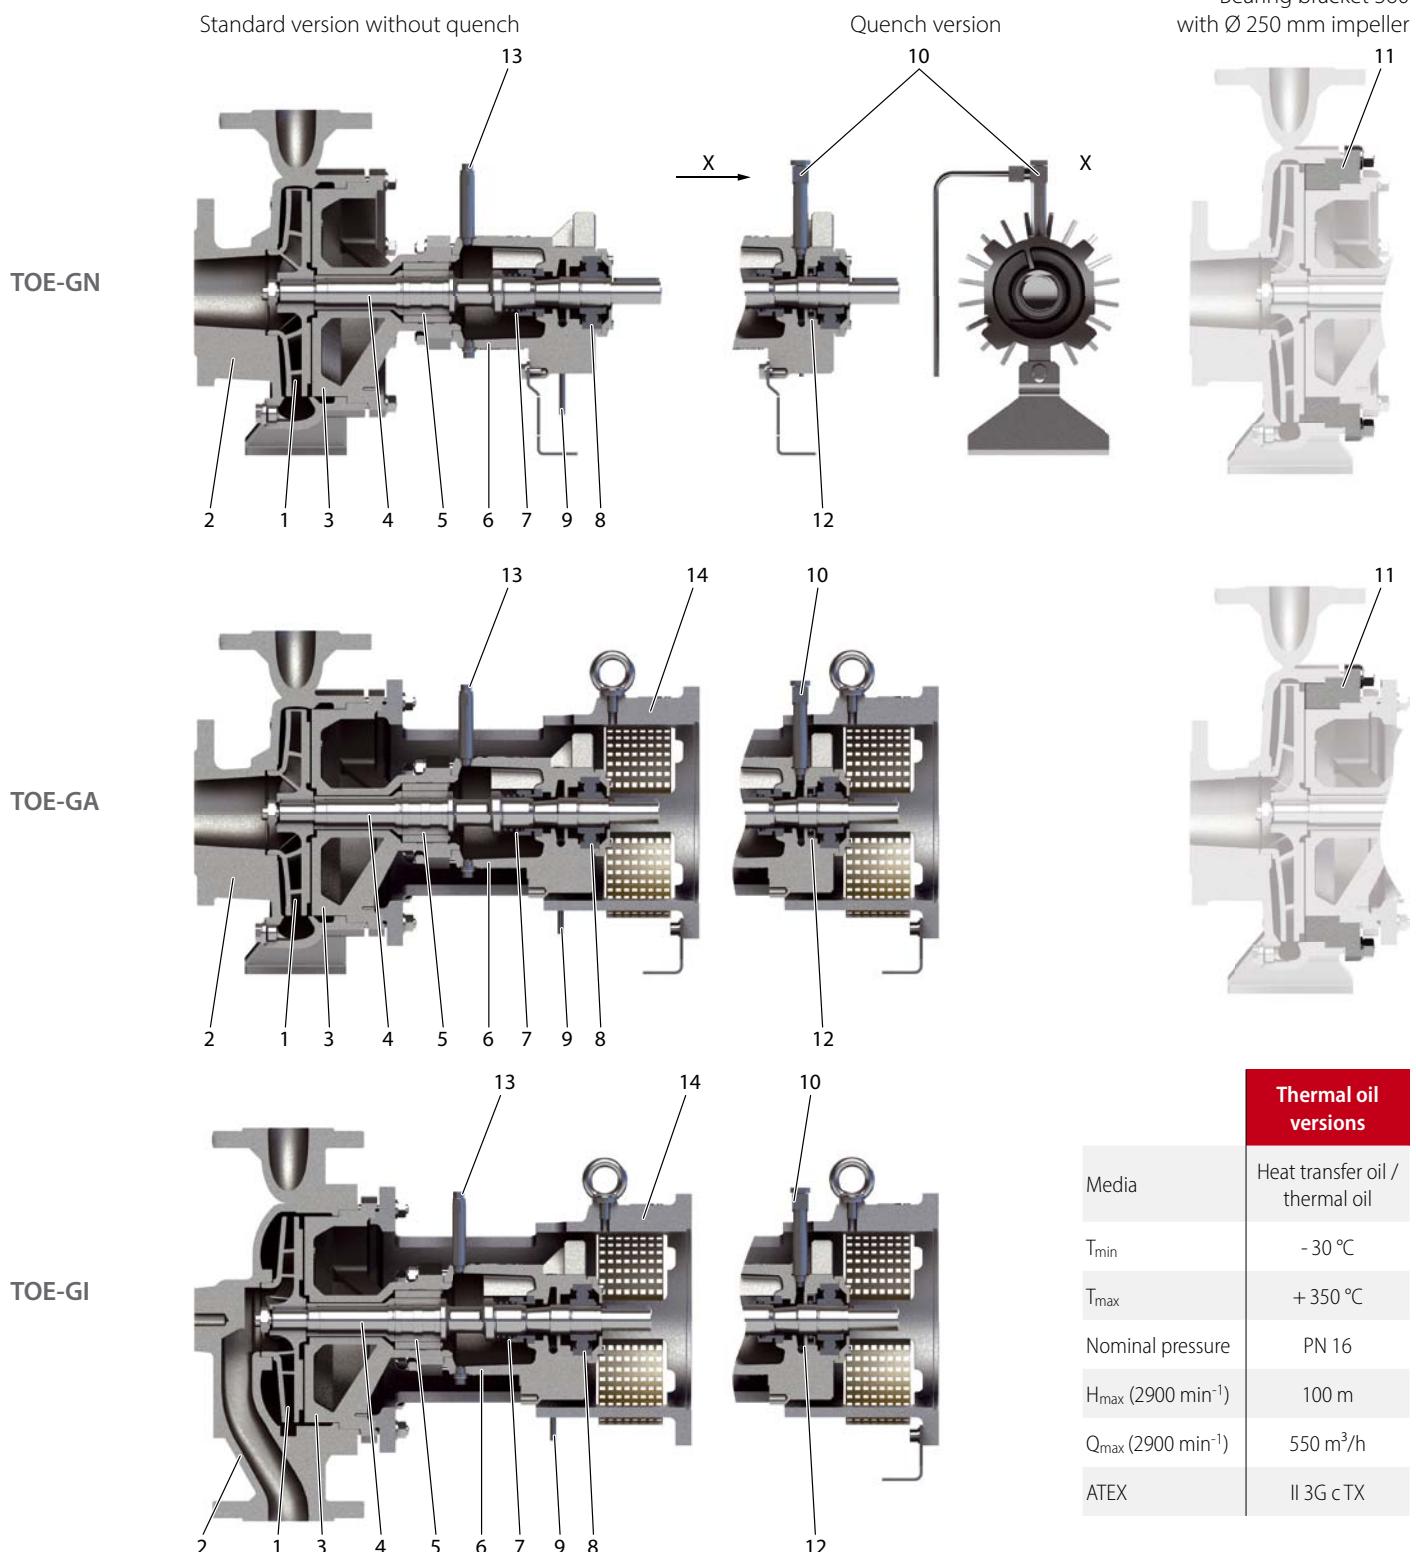

Thermal oil versions


Media	Heat transfer oil / thermal oil
T _{min}	- 30 °C
T _{max}	+ 350 °C
Nominal pressure	PN 16
H _{max} (2900 min ⁻¹)	100 m
Q _{max} (2900 min ⁻¹)	550 m ³ /h
ATEX	II 3G c TX

No.	Description	Material / Remarks
1	Impeller	EN-GJL-250
2	Casing	EN-GJS-400-15
3	Casing cover	EN-GJS-400-15
4	Shaft	1.4122
5	Sleeve bearing	SiC
6	Mechanical seal casing	EN-GJS-400-15
7	Mechanical seal	AQ ₁ VGG, unbalanced
8	Rolling bearing	High-quality brand

No.	Description	Material / Remarks
9	Leakage pipe	not applicable to quench version
10	Quench reservoir	optional
11	Counter flange	EN-GJS-400-15
12	Radial shaft sealing ring	only available with quench version
13	Ventilation	
14	Bracket	EN-GJS-400-15

EN-GJL-250 = GG-25
EN-GJS-400-15 = GGG-40

Hot water versions

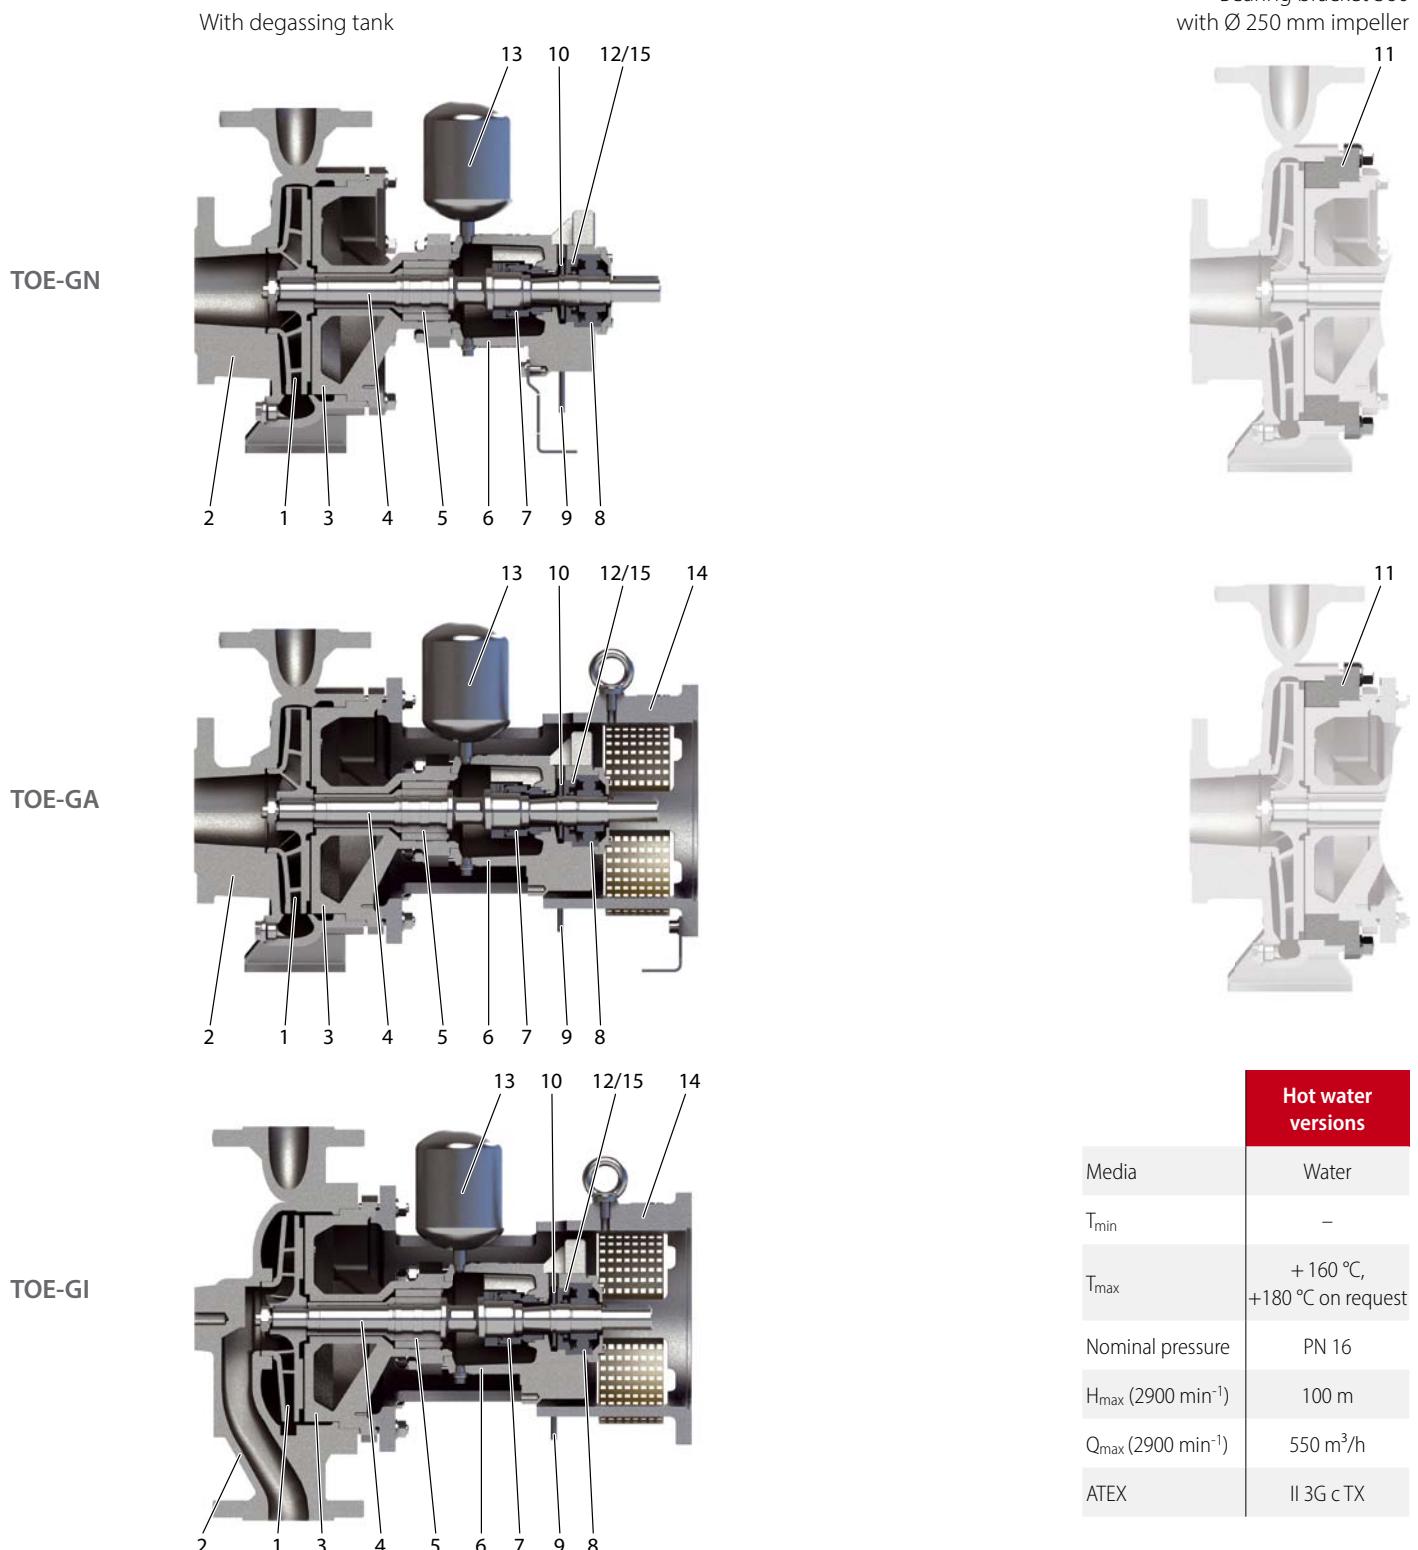

Hot water versions

Media	Water
T _{min}	-
T _{max}	+160 °C, +180 °C on request
Nominal pressure	PN 16
H _{max} (2900 min ⁻¹)	100 m
Q _{max} (2900 min ⁻¹)	550 m ³ /h
ATEX	II 3G c TX

No.	Description	Material / Remarks
1	Impeller	EN-GJL-250
2	Casing	EN-GJS-400-15
3	Casing cover	EN-GJS-400-15
4	Shaft	1.4122
5	Sleeve bearing	SiC
6	Mechanical seal casing	EN-GJS-400-15
7	Mechanical seal	AQ ₁ KGG, balanced
8	Rolling bearing	High-quality brand

No.	Description	Material / Remarks
9	Leakage pipe	
10	Splash ring	
11	Counter flange	EN-GJS-400-15
12	Radial shaft sealing ring	
13	Degassing tank	
14	Bracket	EN-GJS-400-15
15	Bush	

EN-GJL-250 = GG-25 | EN-GJS-400-15 = GGG-40

Simple and optimal configuration software

SPAIX selection program

The screenshot shows the SPAIX selection program interface. On the left, under 'Areas of application', several categories are listed: Gesamtprogramm, high head pump, MZ, side channel pumps, TOE-M stainless steel, and heat transfer engineering. A red box labeled '1' highlights the 'heat transfer engineering' option. In the center, a list of pump series is shown, with 'TOE-G / TOE-GA' checked and highlighted by a red box labeled '2'. On the right, operating data specification parameters like Duty point name, Flow, Head, and Duty pressure are set. A red box labeled '3' highlights the 'Kind of circuit' dropdown set to 'Single head pump'. The bottom right shows ambient conditions like Temperature, Density, Viscosity, and Vapour pressure.

The software allows you to configure heat transfer pumps, side channel pumps and boiler feed pumps via your Internet browser. As well as design details, the system will also request operating details and details about the medium to be pumped.

Ideal for system planners

Speck now also offers the latest version 4 of the renowned SPAIX design software.

We make the program available to authorised customers who can pre-select the pumps within their system.

The web-based software always accesses an up-to-date database.

Easy pre-selection

The configuration system avoids a wide range of selection parameters with regard to design, sealing systems, hydraulics, operating conditions and media.

The software has language options for German and English.

Checking the pre-selection

When the order is submitted, the customer's choices are double-checked to ensure that your project requirements are met.

Key

1 List of all pump designs that can be configured in the software

2 List of all series within the pump designs


3 Selection parameters operating parameters and medium data in the first instance

4 Characteristic curve depending on hydraulic selection generated




Characteristic curve depending on hydraulic selection

Documentation based on the selection program

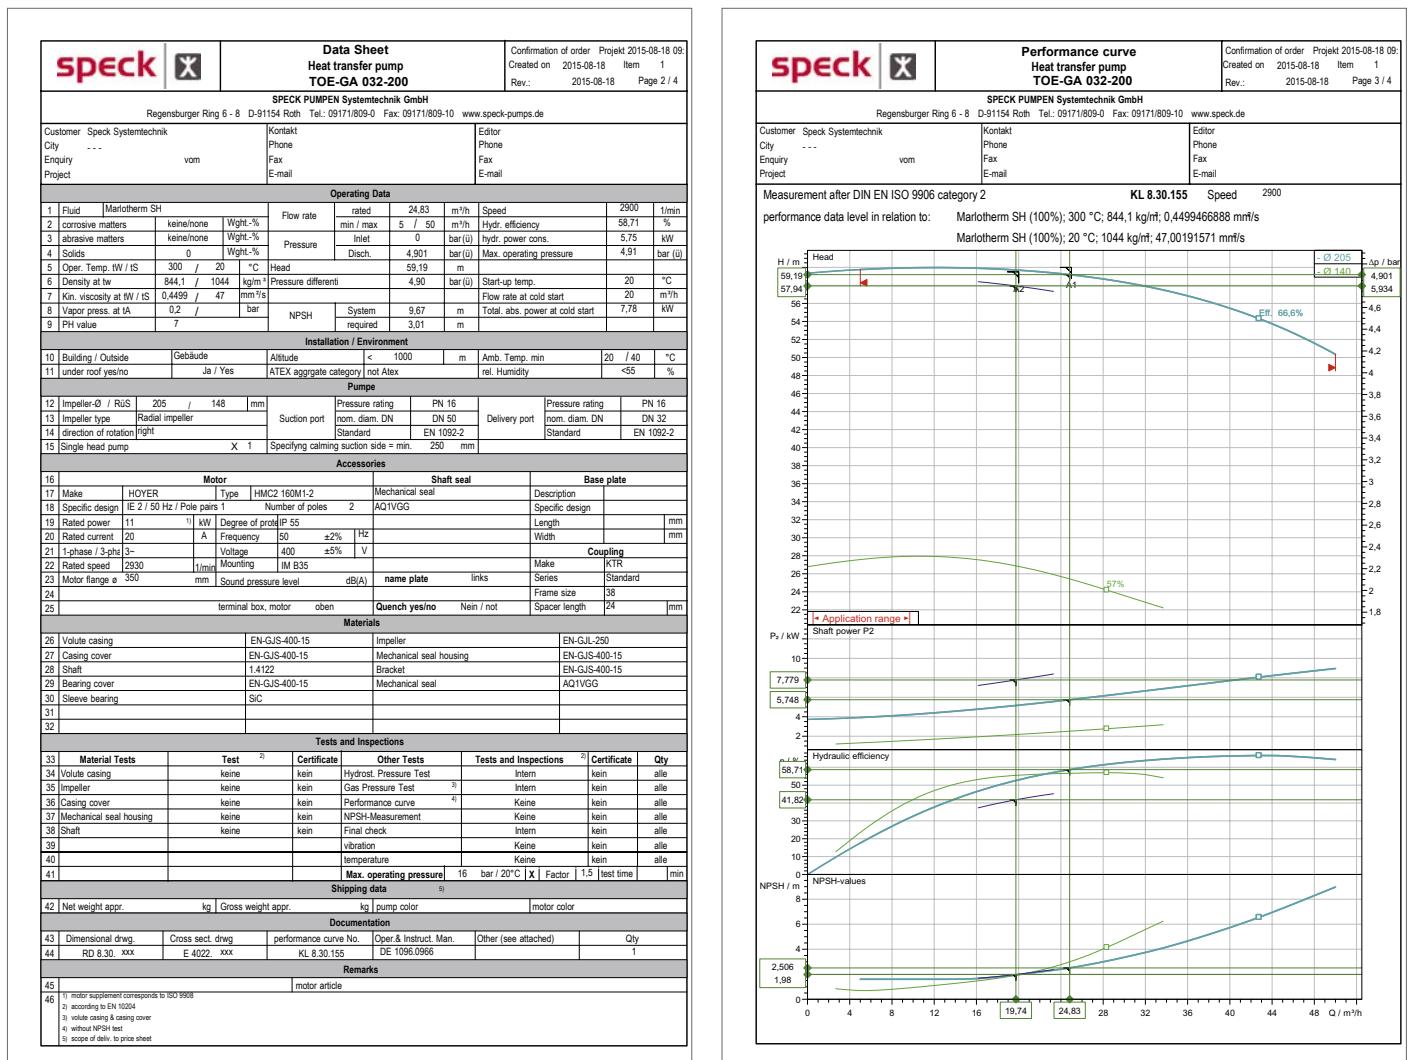

Technical data sheet (example)

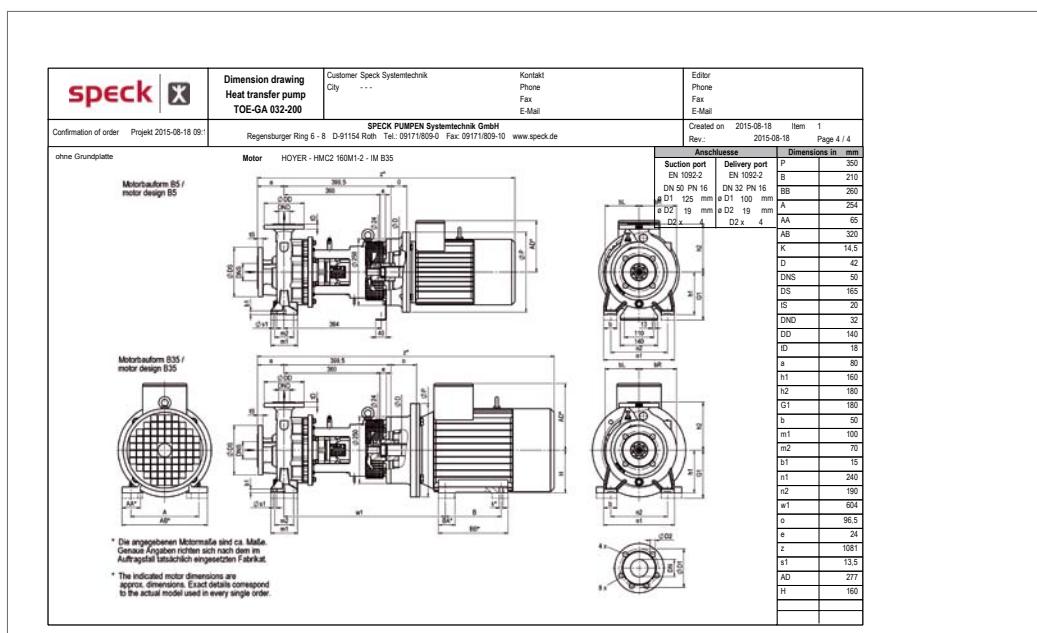

Dimensional drawing (example)

Order-related tests

Pressure tests

Speck carries out the tests below as standard:

Gas pressure test

The gas pressure test is used to prove that the components are leak-proof. All components that bear pressure are tested, such as the volute casing, casing cover and mechanical seal casing. The test is carried out with forming gas at 2 bar. The holding time is 15 minutes.

Hydrostatic pressure test

The hydrostatic pressure test is used to prove strength of the components and that the pump is leak-proof. The fully assembled pump is tested. The test is carried out with a hydrostatic test pressure based on prEN 12162; the hydrostatic test pressure corresponds to 1.5 x the nominal pressure (PN16) at 20 °C. The holding time is 10 minutes.

If you want to use pressure tests according to different criteria, please enter them in the request.

Testing the performance

At the customer's request, Speck offers the following tests:

Hydraulic tests

Measurement according to DIN EN ISO 9906, Class II, Acceptance Class 2B, Edition March 2013

NPSH test

In this test, the suction-side pressure is gradually reduced until the decrease in the delivered head reaches 3 % at a constant flow rate. At least four flows are evaluated that are spread appropriately over the admissible operating range. The NPSH value is not a guarantee point.

Vibration test

Vibration test according to EN ISO 5199, Edition 2002

The vibration values are measured radially and vertically at every operating point on the bearing casing at the nominal speed and with the corresponding flow rate.

Temperature measurement

The measurement is taken on the motor-side bearing at operating temperature. The operating temperature and the ambient temperature at every operating point measured are documented.



Computer-controlled and fully automated test stands on the premises of Speck in Roth.

Measuring hydraulics, power requirements, axial thrust, vibrations and NPSH values. Heads of up to 400 m and flow rates of up to 750 m³/h are possible.

Further data and notes

Standard conditions at site

- » Ambient temperature from -20 °C to +40 °C
- » Permissible altitude up to 1000 m above seal level

Deviations from the site conditions specified herein must already be disclosed in the inquiry.

Painting

The pumps are coated with highly heat-resistant white aluminium paint, colour code RAL 9006.

Dimensioning

Assessment of the maximum pump outlet pressure

The pump outlet pressure at the pump nozzle depends on

- » the pump inlet pressure
- » the maximum total head of the selected impeller diameter
- » the density of the medium to be pumped

The maximum pump outlet pressure $p_{2\max op}$ is calculated using the formula:

$$p_{2\max op} = p_{1\max op} + \rho \cdot g \cdot H \cdot 10^{-5}$$

With:


- $p_{2\max op}$ = maximum pump outlet pressure [bar]
- $p_{1\max op}$ = maximum pump inlet pressure [bar]
- ρ = density of the medium to be pumped [kg/m^3]
- g = gravitation constant [m/s^2]
- H = maximum total head at zero flow or at the peak of the pump's characteristic curve at the selected impeller diameter [m]

Pumps must be selected and operated in a way which ensures that the maximum pump outlet pressure does by no means exceed the maximum permissible operating pressure of the casing $p_{all w c}$ at operating pressure.

This also applies to commissioning while the discharge valve is closed (refer to diagram).

Pressure and temperature limitations



The maximum casing operating pressure $p_{all w c}$ of the pressure retaining parts depends on the operating temperature:

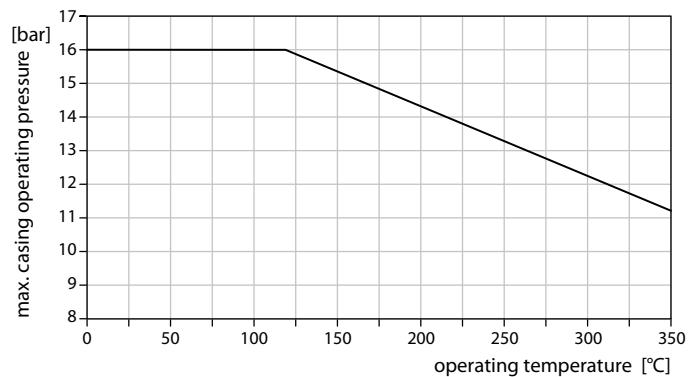

Maximum permissible casing operating pressure $p_{all w c}$

TOE-GN / GA – Characteristic curves

50 Hz

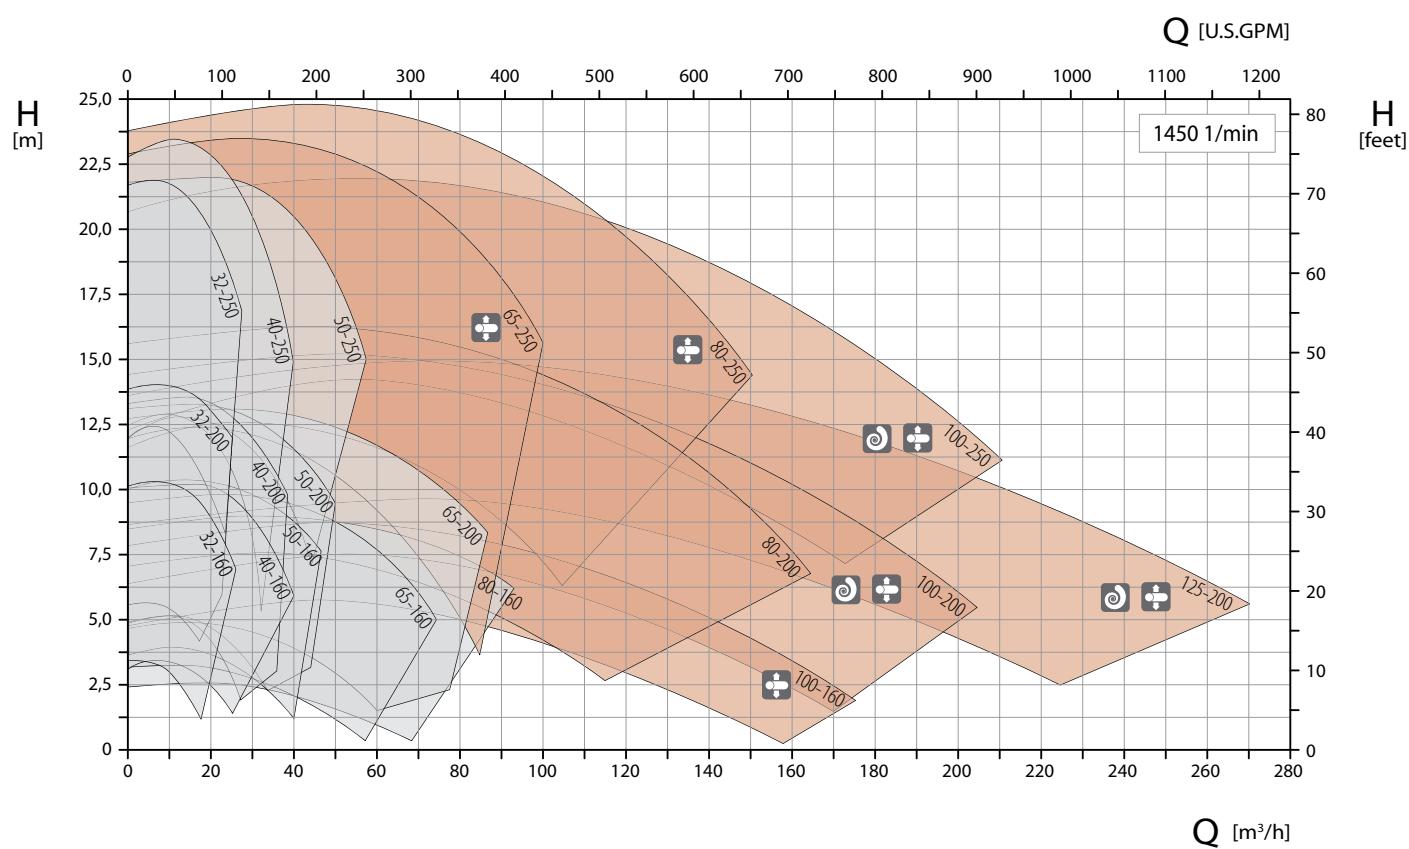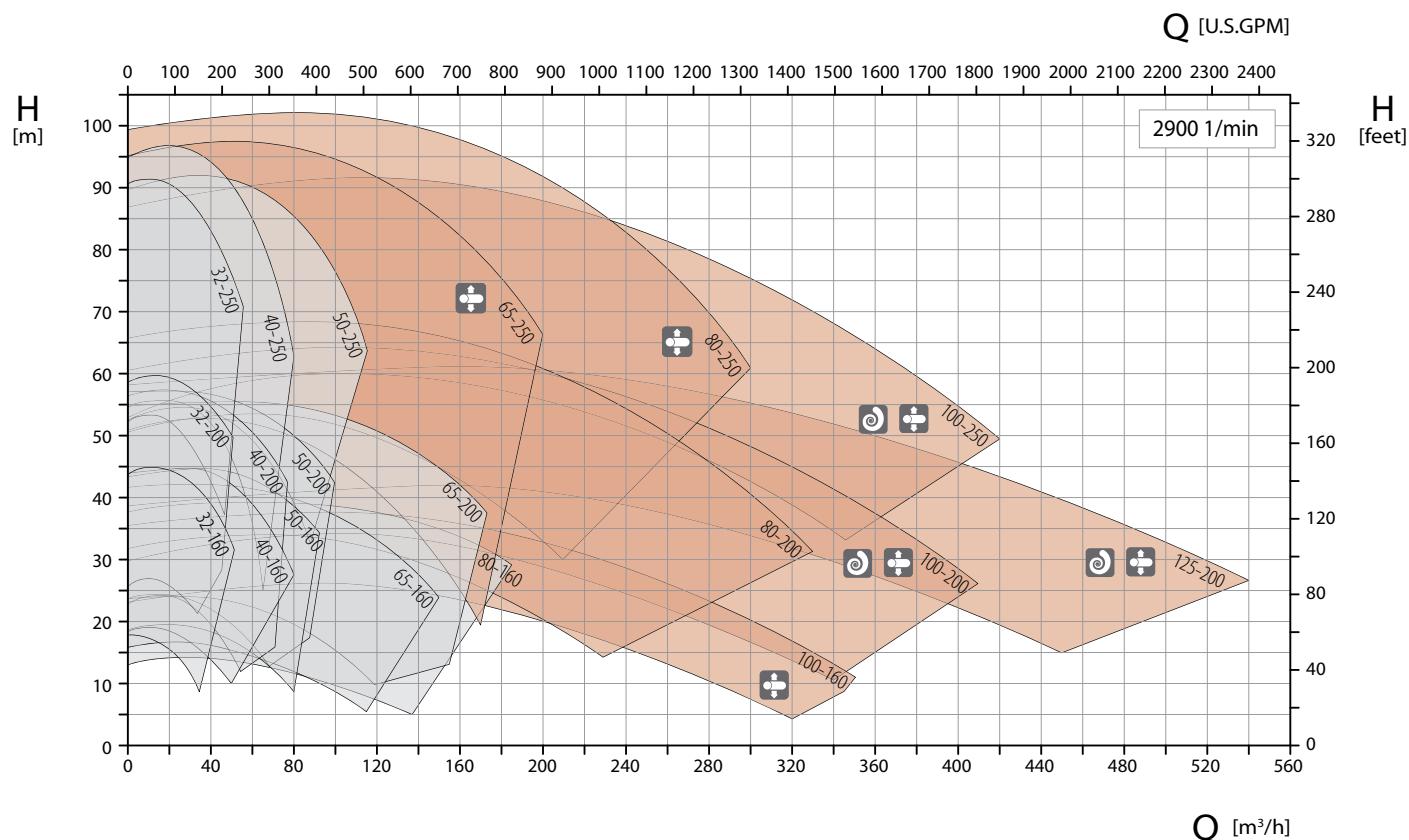



Bearing bracket 360

Bearing bracket 470

⌚ Casing with double volute

÷ Casing with centreline mounting

60 Hz

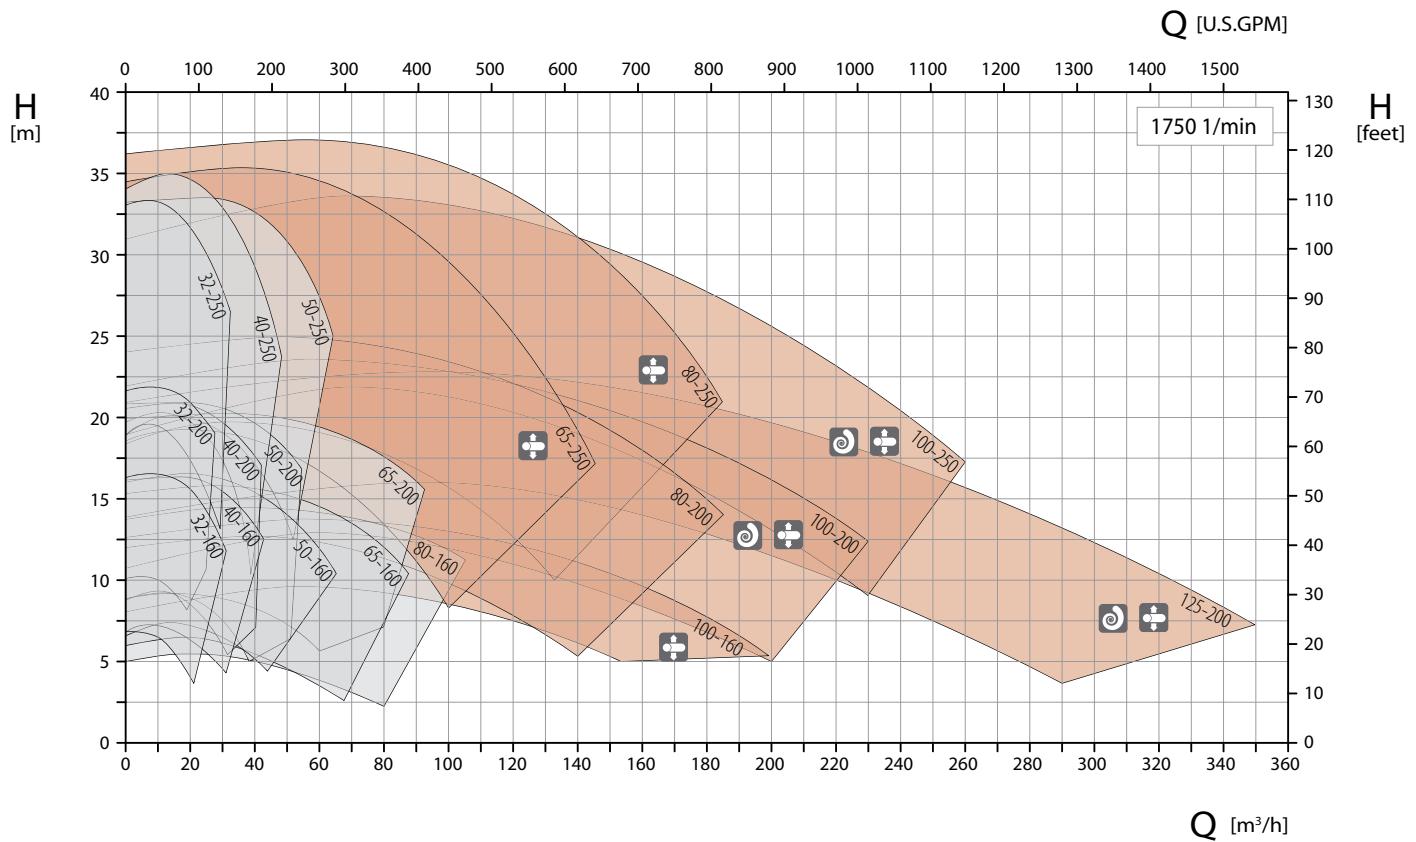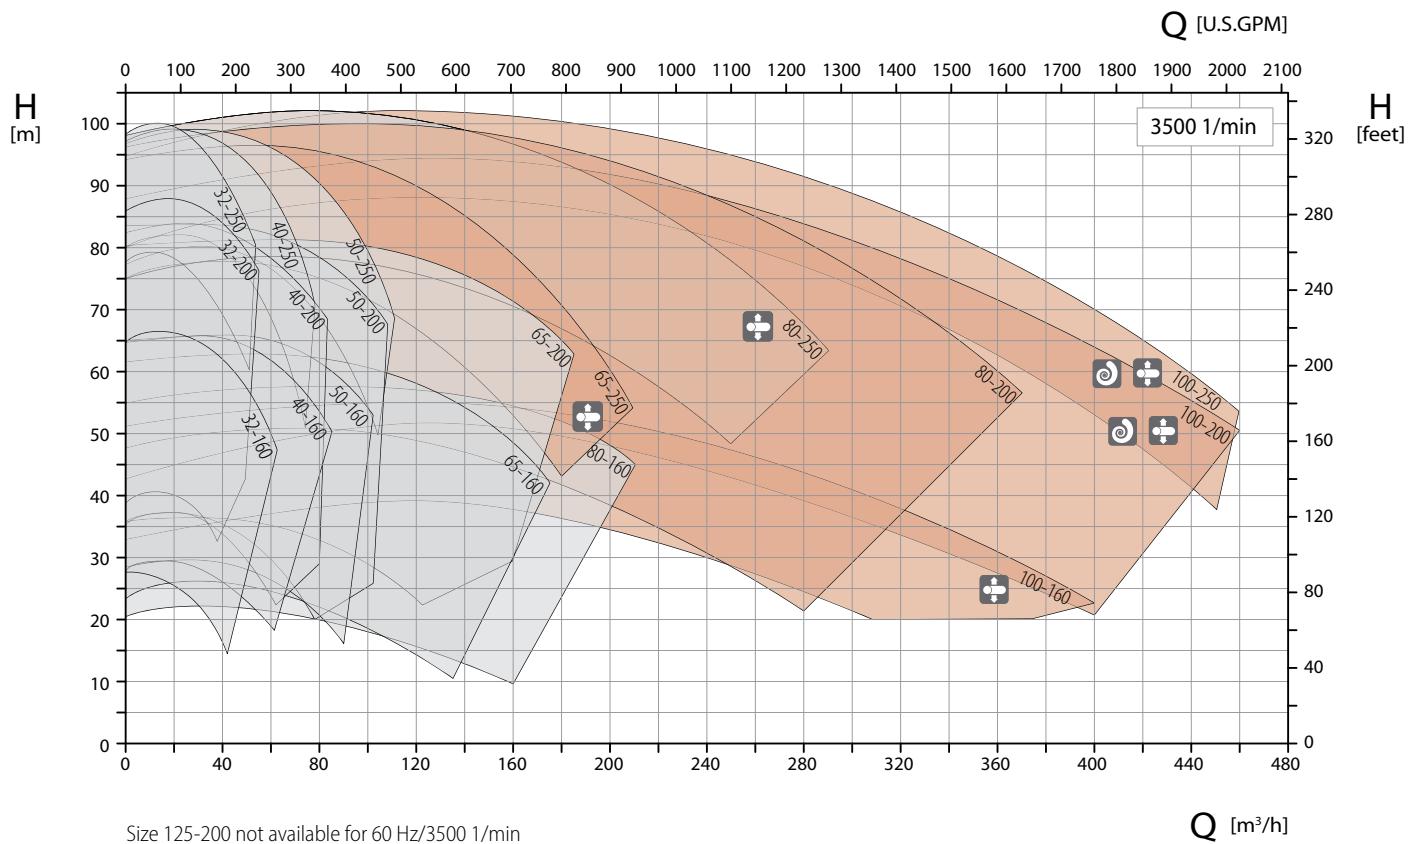**Bearing bracket 360****Bearing bracket 470**



Casing with double volute



Casing with centreline mounting

TOE-GI – Characteristic curves



50 Hz

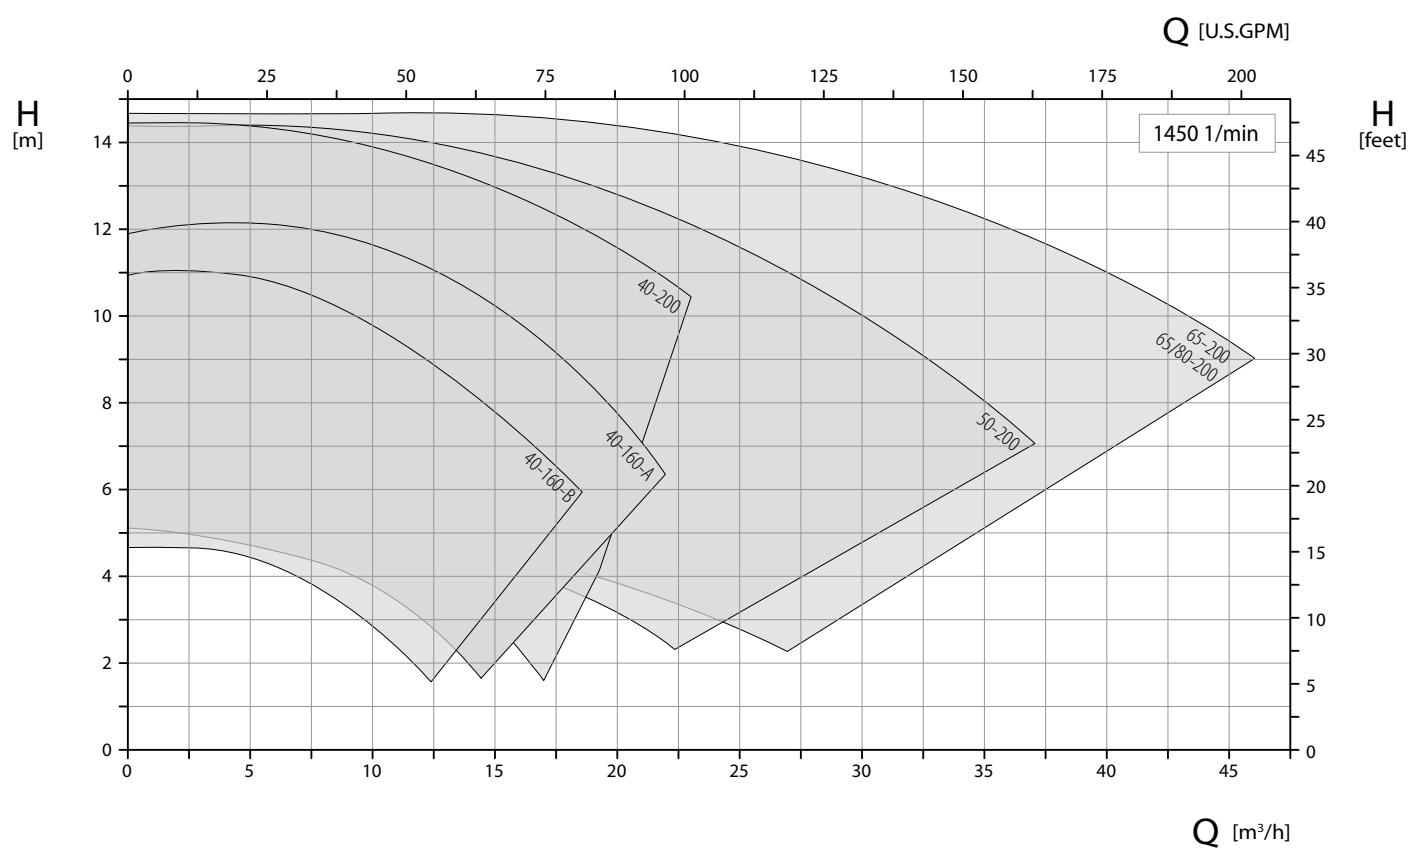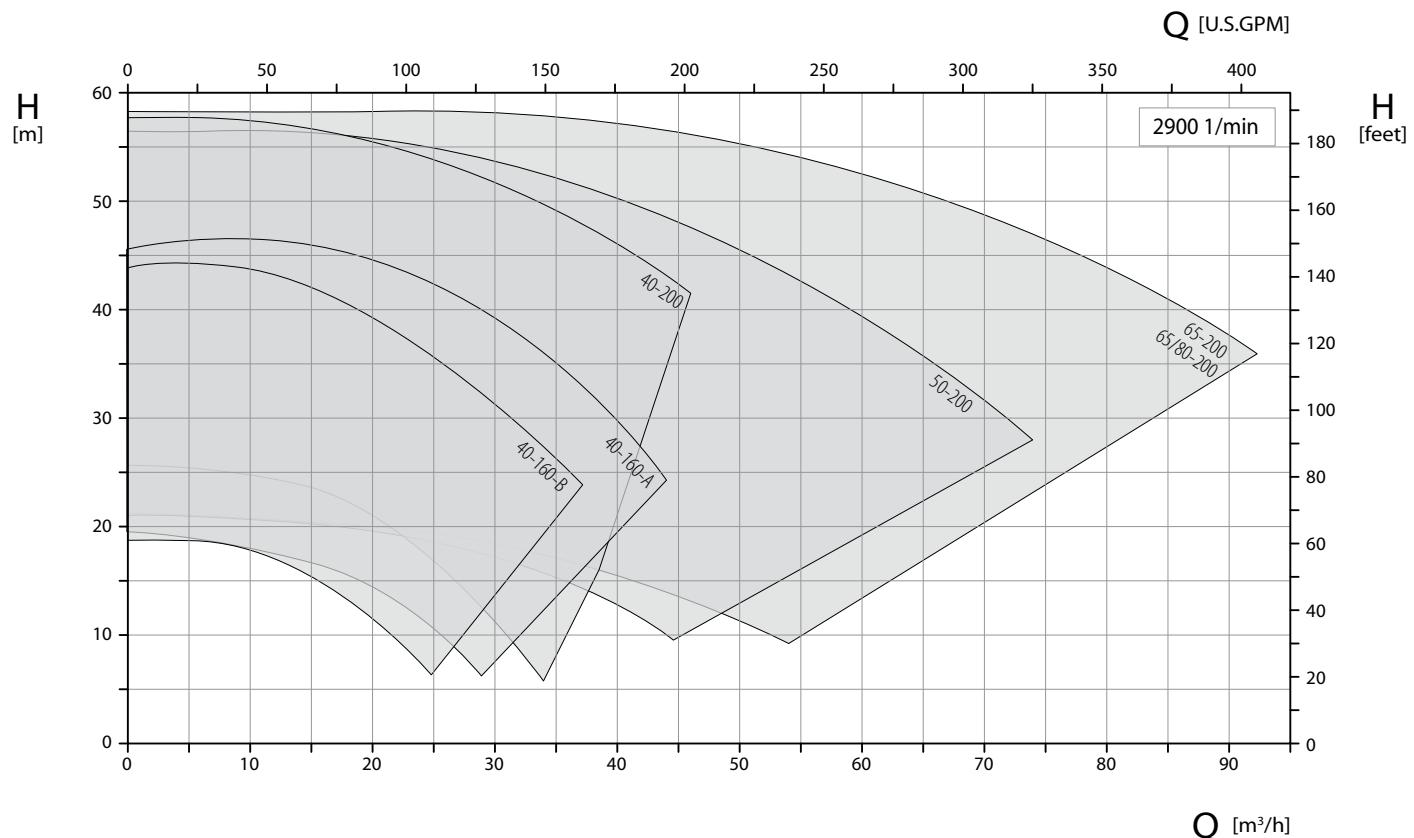

Bearing bracket 360

Size 40-160 with hydraulics A or B available

60 Hz

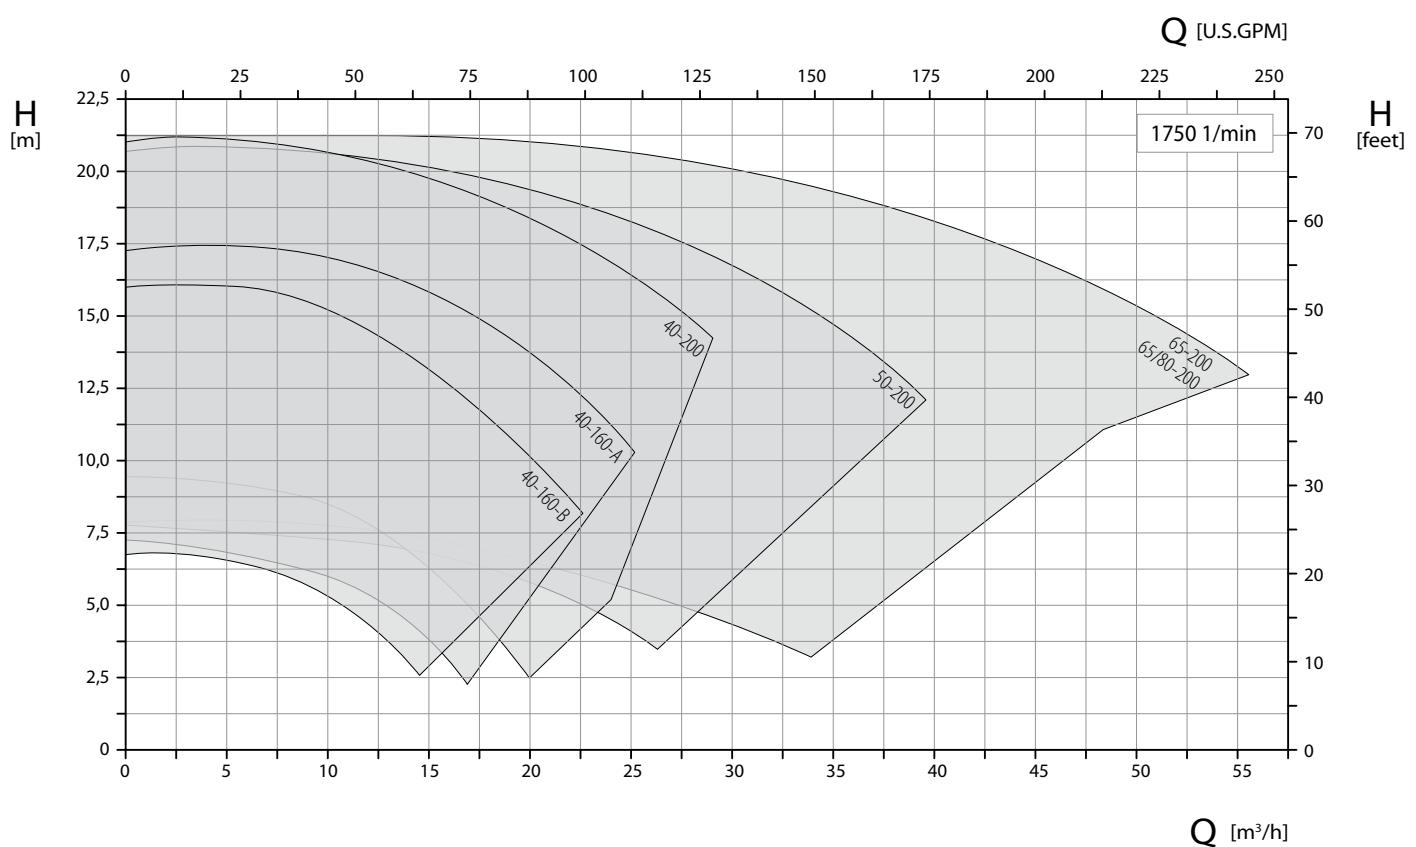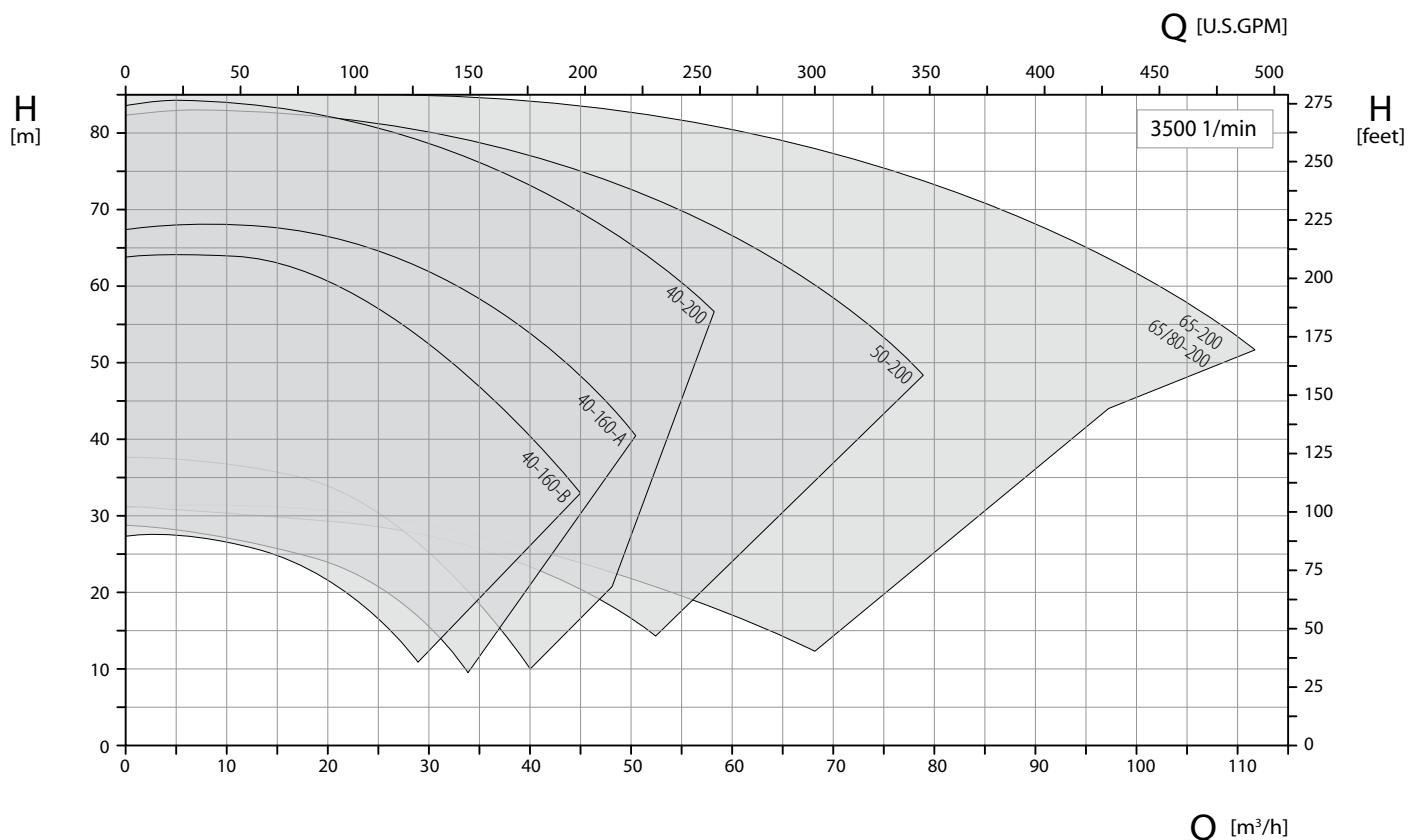
**Bearing bracket 360**

Size 40-160 with hydraulics A or B available


TOE-GN / GA – Dimensions and connections

Bearing bracket 360

TOE-GN

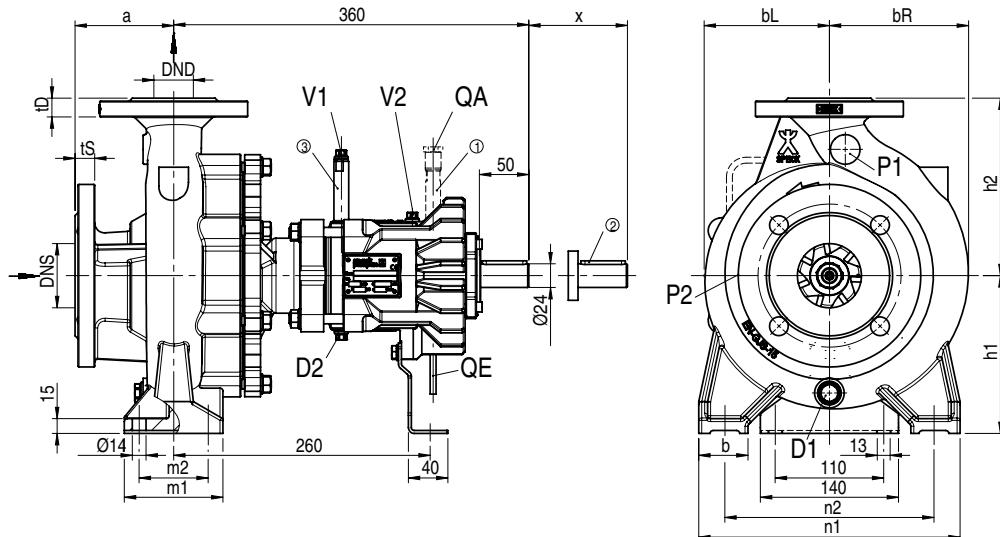

TOE-GA

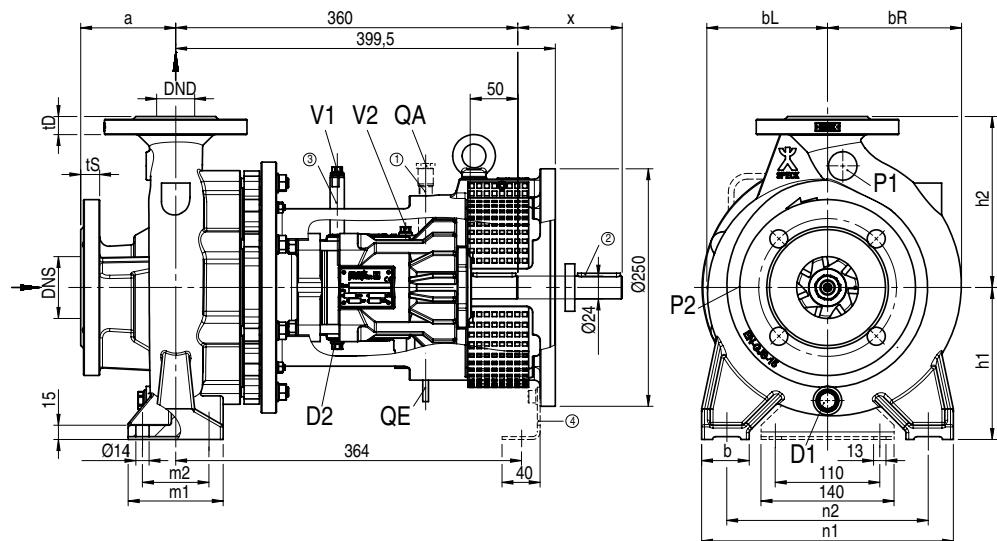

Size	DNS	DS	tS	DND	DD	tD	a	bL	bR	h1	h2	b	m1	m2	n1	n2	x
32-160	50	165	20	32	140	15	80	116	121	132	160	50	100	70	240	190	110
32-200	50	165	20	32	140	18	80	123	135	160	180	50	100	70	240	190	110
32-250	50	165	20	32	140	18	100	152	163	180	225	65	125	95	320	250	110
40-160	65	185	20	40	150	18	80	123	129	132	160	50	100	70	240	190	110
40-200	65	185	20	40	150	18	100	127	141	160	180	50	100	70	265	212	110
40-250	65	185	20	40	150	18	100	151	160	180	225	65	125	95	320	250	110
50-160	65	185	20	50	165	20	100	123	136	160	180	50	100	70	265	212	110
50-200	65	185	20	50	165	20	100	130	148	160	200	50	100	70	265	212	110
50-250	65	185	20	50	165	20	100	157	170	180	225	65	125	95	320	250	110
65-160	80	200	22	65	185	20	100	124	151	160	200	65	125	95	280	212	110
65-200	80	200	22	65	185	20	100	136	164	180	225	65	125	95	320	250	110
80-160	100	220	24	80	200	22	125	139	174	180	225	65	125	95	320	250	110

Utility connections

- P1 G 1/4 Manometer connection pressure-side (without bore)
P2 G 1/8 Manometer connection suction-side (without bore)
V1 G 1/8 Ventilation mechanical seal casing (horizontal set-up), not applicable for hot water version
V2 G 1/8 Ventilation mechanical seal casing (vertical set-up), not applicable for hot water version
D1 G 3/8 Drainage volute casing
D2 G 1/8 Drainage mechanical seal casing
QE G 1/8 Leakage evacuation mechanical seal
QA G 1/8 Quench (optional)

① Quench optionally

② Fitting key DIN 6885


③ Venting pipe

④ Feet applicable for motor design B5 only

Flange dimensions → page 16

TOE-GN / GA – Dimensions and connections

Bearing bracket 470

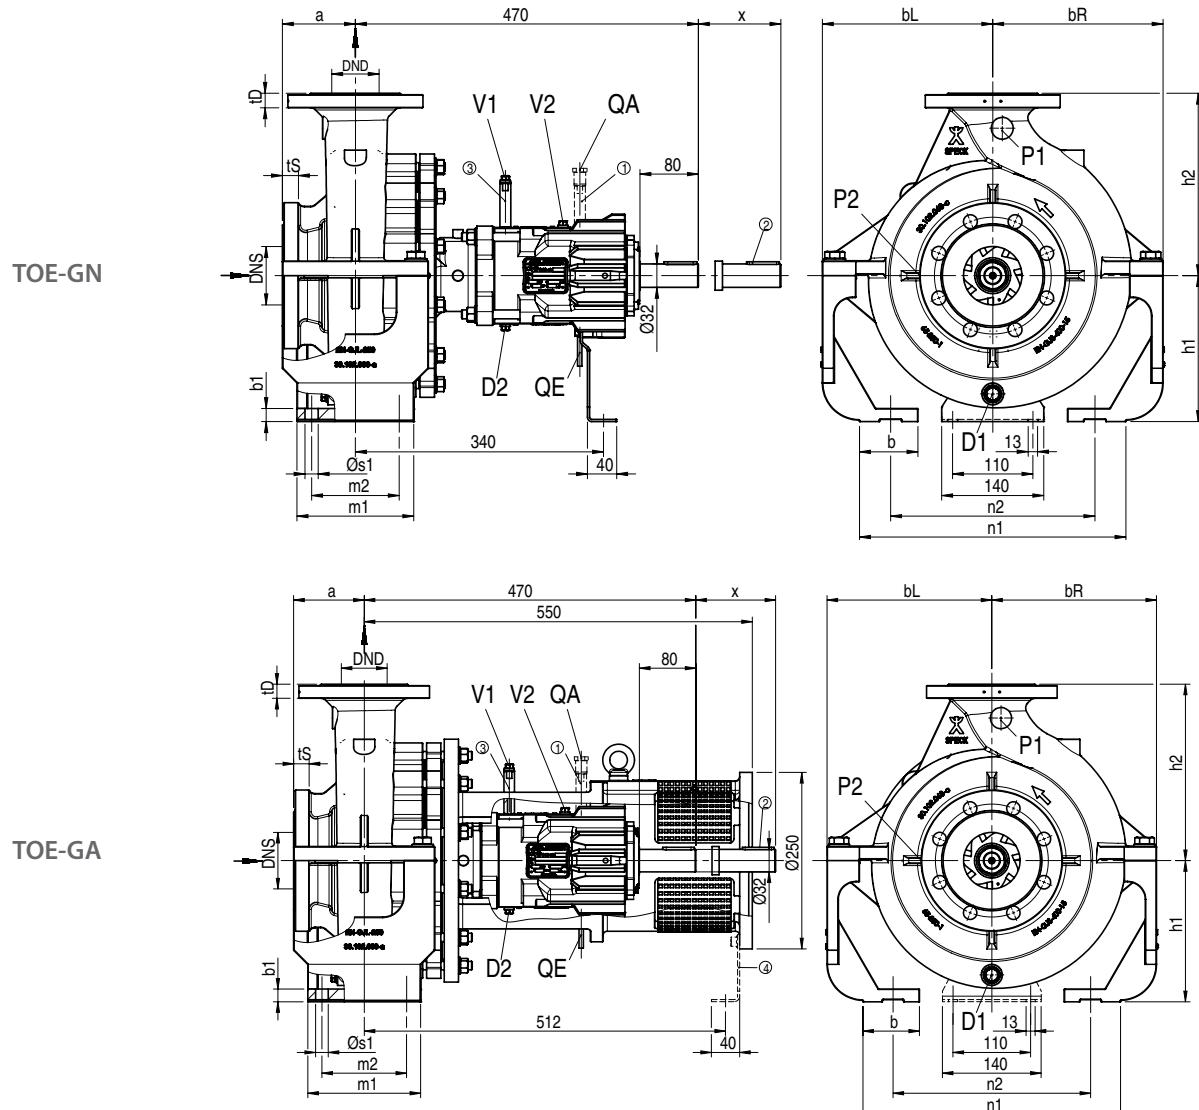

Size	DNS	DS	tS	DND	DD	tD	a	bL	bR	h1	h2	b	b1	m1	m2	n1	n2	øs1	x
65-250	80	200	22	65	185	20	100	233,5	233,5	200	250	80	18	160	120	360	280	18	140
80-200 ¹	100	220	24	80	200	22	125	162,5	191	180	250	65	15	125	95	345	280	14	140
80-250 ²	100	220	24	80	200	22	125	181	206,5	200	280	80	18	160	120	400	315	18	140
100-160	125	254	26	100	230	25	125	233,5	233,5	200	280	80	18	160	120	360	280	18	140
100-200 ³	125	254	26	100	230	25	125	233,5	233,5	200	280	80	18	160	120	360	280	18	140
100-250 ³	125	254	26	100	230	25	140	230	230	225	280	80	18	160	120	400	315	18	140
125-200 ³	150	285	26	125	254	26	140	262	262	250	315	80	18	160	120	400	315	18	140

¹ Casing with feet resp. without centreline mounting

² Casing with feet – as of 2015 with centreline mounting

³ Casing with double volute

Utility connections

- P1 G 1/4 Manometer connection pressure-side (without bore)
- P2 G 1/8 Manometer connection suction-side (without bore)
- V1 G 1/8 Ventilation mechanical seal casing (horizontal set-up), not applicable for hot water version
- V2 G 1/8 Ventilation mechanical seal casing (vertical set-up), not applicable for hot water version
- D1 G 3/8 Drainage volute casing
- D2 G 1/8 Drainage mechanical seal casing
- QE G 1/8 Leakage evacuation mechanical seal
- QA G 1/8 Quench (optionally)

① Quench optionally

② Fitting key DIN 6885

③ Venting pipe


④ Feet applicable for motor design B5 only

Flange dimensions → page 16

TOE-GI – Dimensions and connections

Bearing bracket 360

TOE-GI

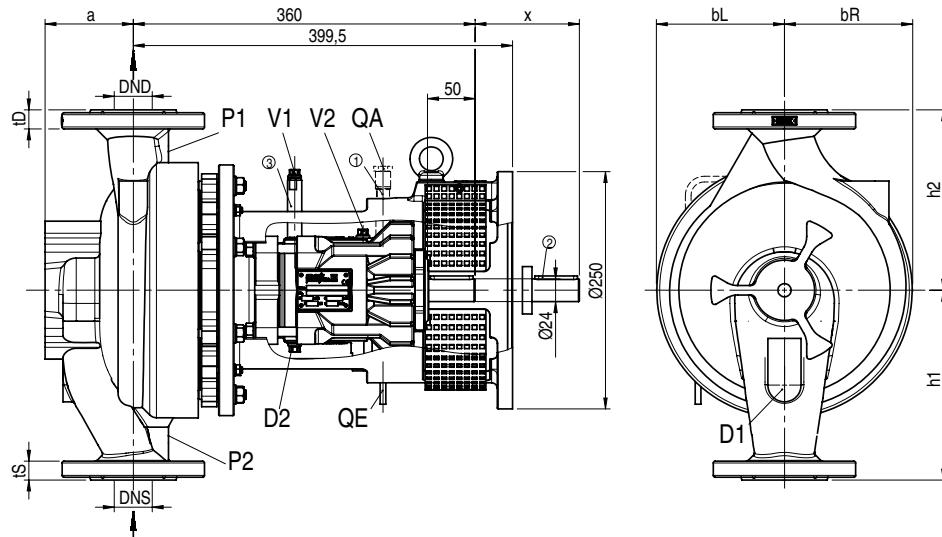

Size	Casing	DNS	DND	a	DD	DS	tD	tS	bL	bR	h1	h2	x
40-160	INA	40	40	97	150	150	20	20	116	116	200	190	110
40-160	INB	40	40	97	150	150	20	20	116	116	180	160	110
40-200	INA	40	40	93	150	150	20	20	135	135	200	190	110
50-200	INA	50	50	102	165	165	21	21	126	139	220	205	110
50-200	INB	50	50	92	165	165	21	21	126	139	200	180	110
65-200	INA	65	65	112	185	185	23	23	131	151	240	225	110
65/80-200	INB	80	80	112	200	200	23	23	131	151	255	225	110

Anschlüsse


P1	G 1/4 Manometer connection pressure-side (without bore)
P2	G 1/8 Manometer connection suction-side (without bore)
V1	G 1/8 Ventilation mechanical seal casing (horizontal set-up), not applicable for hot water version
V2	G 1/8 Ventilation mechanical seal casing (vertical set-up), not applicable for hot water version
D1	G 3/8 Drainage volute casing
D2	G 1/8 Drainage mechanical seal casing
QE	G 1/8 Leakage evacuation mechanical seal
QA	G 1/8 Quench (optionally)

- ① Quench optionally
- ② Fitting key DIN 6885
- ③ Venting pipe

Flange dimensions

Flanges in acc. with DIN EN 1092-2			
DN	ØD1	ØD3	Holes
32	100	19	4
40	110	19	4
50	125	19	4
65	145	19	4
80	160	19	8
100	180	19	8
125	210	19	8
150	240	23	8

Flanges in acc. with DIN EN 1092-2, drilled in acc. with ANSI 150 lbs			
DN	ØD1	ØD3	Holes
32	88,9	16	4
40	98,6	16	4
50	120,7	19	4
65	139,7	19	4
80	152,4	19	4
100	190,5	19	8
125	215,9	22	8
150	241,3	22	8

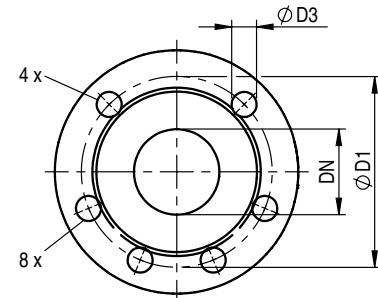

Interchangeability of parts

All series including the versions with magnetic coupling (→ brochure TOE-MN/MA/MI series) offer a high degree of interchangeability.

Same components within TOE-GN/GA/GI series


Compare only numbers within one **row**:

1 and **1** = same number means same component

1 and **2** and ... = different numbers mean different components


Component	No.	Series	Pump size																		
			32-160	32-200	32-250	40-160	40-200	40-250	50-160	50-200	50-250	65-160	65-200	80-160	65-250	80-200	80-250	100-160	100-200	100-250	125-200
Bearing bracket complete	-	GN GA GI	1	2	1	2	1	2	1	2	1	2	1	3	4	3	5	4	3	4	
Mechanical seal	47	GN GA GI						1										2			
Volute casing	102	GN GA -	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
		- - GI				20	21		22			23									
Casing cover	161	GN GA GI	1	2	1	2	1	2	1	2	1	2	1	3	4	3	5	4	3	4	
Shaft	211	GN GA GI						1										2			
Impeller	230	GN GA -	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
		- - GI				1	20		5			8									
Sleeve bearing	310 / 310.1	GN GA GI						1										2			
Ball bearing	320	GN GA GI						1										2			
Bracket	341	- GA GI						1										2			
Flat gasket	400	GN GA GI						1										2			
Flat gasket	400.1	GN GA -			1		1		1												
Flat gasket	400.2 / 400.3	GN GA GI						1										2			
Mechanical seal casing ¹	441	GN GA GI						1										2			
Counter flange	720	GN GA -			1		1		1												
further parts	-	GN GA GI						1										2			

¹ Thermal oil version and hot water version deviating

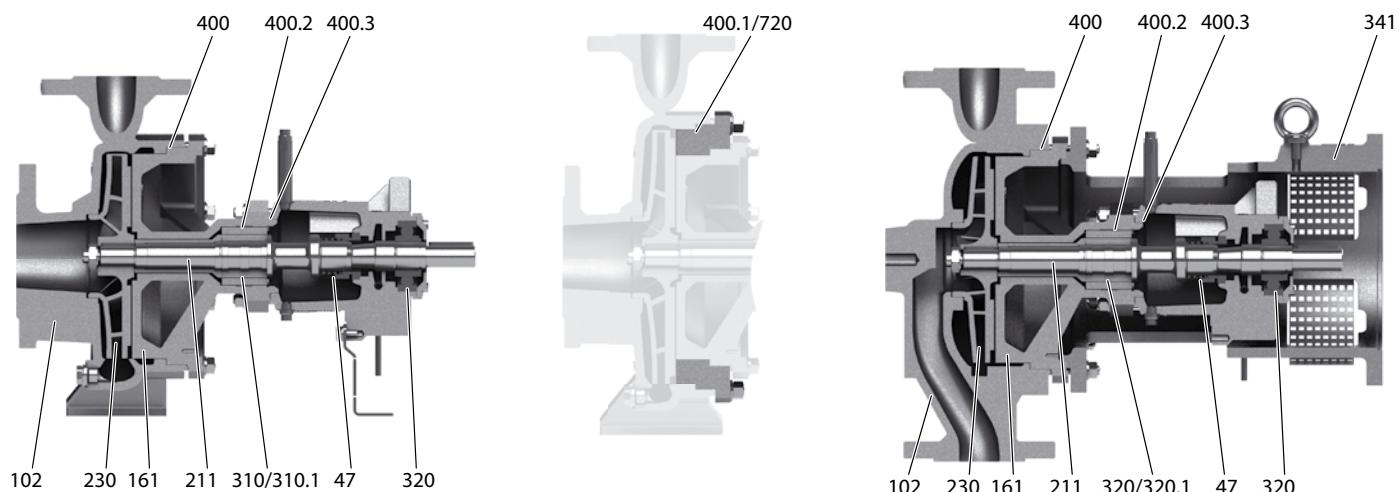

Pumps for heat transfer technology

*Centrifugal pumps
with magnetic coupling*

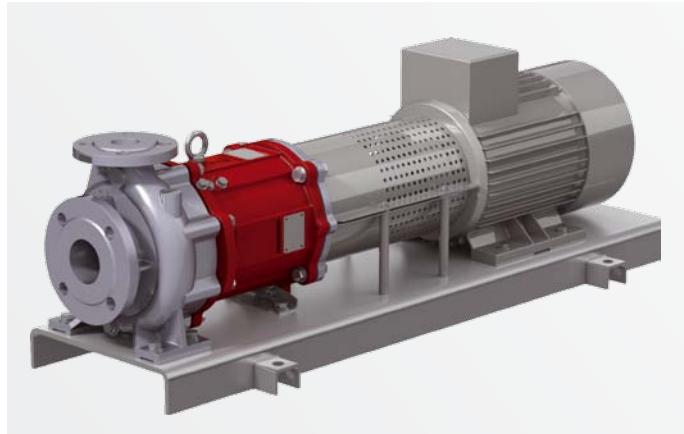

Modular system

TOE-M and TOE-G series mean a consistent designed modular system. Hydraulics and the main part of the used components are identical and interchangeable.

TOE-M Series

Developed for circulating organic or synthetic heat transfer oils in heat transfer systems in accordance with DIN 4754

Suitable for pumped media with low amounts of non-abrasive impurities

	Spheroidal graphite cast iron versions	Stainless steel versions
Media	Heat transfer oil / thermal oil	Heat transfer oil / thermal oil
T _{min}	-40 °C	-100 °C
T _{max}	+350 °C	+250 °C
Casing	Spheroidal graphite cast iron	Stainless steel
Nominal pressure	PN 16	
H _{max} (2900 min ⁻¹)	100 m	60 m
Q _{max} (2900 min ⁻¹)	550 m ³ /h	170 m ³ /h
ATEX	II 2G c b TX	

Pumps for fluids up to +400 °C on request

Description in full length → see brochure TOE-M series

*Regenerative turbine pumps
with magnetic coupling*



NPY-MK and CY-MK Series

Tried and tested and compact close-coupled pumps with top/top casings and magnetic coupling. Developed for transporting and circulating organic or synthetic heat transfer oils and hot water. Suitable for pumped media with low amounts of non-abrasive impurities. Suitable for the delivery of gas shares due to the principle of delivery.

	Thermal oil versions	Hot water versions
Media	Heat transfer oil / thermal oil	Water
T _{min}	-100 °C	-
T _{max}	+ 350 °C + 400 °C on request	+ 220 °C higher temp. on request
Casing	Spheroidal graphite cast iron or stainless steel	
Nominal pressure	PN 25 higher pressures on request	
H _{max} (2900 min ⁻¹)	90 m	
Q _{max} (2900 min ⁻¹)	12 m ³ /h (200 l/min) 24 m ³ /h (400 l/min) on request	
ATEX	II 2G c b TX	

Compact, robust, durable and safe

Regenerative turbine pumps with magnetic coupling from Speck have been used in a wide range of systems and assemblies successfully for many years. The compact design requires minimal installation space and reduces the weight. The perfected pumps also impress with the small number of extremely high-quality parts.

Robust sleeve bearings made from SiC and ceramic shafts guarantee a long lifetime and are free from leakage and maintenance-free thanks to magnetic couplings.

On request, Speck can also develop special designs for special media or with different hydraulics. Please contact us.

Your notes

A large grid of squares, approximately 20 columns by 25 rows, designed for writing notes.

Your notes

A large grid of empty squares, intended for users to write their own notes or drawings.

Representatives

D Germany

Nord
Ingenieure Willy Wandach GmbH
Flürstraße 105
22549 Hamburg
T: +49 40 398 624 0
F: +49 40 398 624 28
info@speck-nord.de
www.speck-nord.de

Mitte
PLZ 4, 5, 66, 67 - Büro West
Huckauf Ingenieure GmbH
Grillenpfad 28
40764 Langenfeld
T: +49 2173 914 560
info@huckauf.de
www.huckauf.de

PLZ 29-38 - Büro Mitte
Huckauf Ingenieure GmbH
Grottrian-Steinweg-Str. 1c
38112 Braunschweig
T: +49 531 230 090 0
info@huckauf.de
www.huckauf.de

PLZ 0, 39, 98, 99 - Büro Ost
Huckauf Ingenieure GmbH
Rathausstraße 5
09244 Lichtenau
T: +49 37208 660 80
info@huckauf.de
www.huckauf.de

Huckauf Ingenieure GmbH
Fontanepromenade 17
10967 Berlin
T: +49 30 890 959 92
info@huckauf.de
www.huckauf.de

Süd
Speck Pumpen
VERKAUFSGESELLSCHAFT GmbH
Hauptstraße 1 - 3
91233 Neunkirchen a. Sand
T: +49 9123 949 - 0
F: +49 9123 949 - 260
info@speck-pumps.com
www.speck-pumps.com

Service

Deutschland Mitte
FSE Fluid Systems Erfurt
Poeler Weg 6
99085 Erfurt
T: +49 361 550 715 0
F: +49 361 550 715 19
info@fluidsystems.org
www.fluidsystems.org

Köln
Arpuma GmbH
Ottostrasse 10
50170 Kerpen
T: +49 2273 953 300 0
F: +49 2273 953 300 20
info@arpuma.de
www.arpuma.de

International

A Austria
Tuma Pumpensysteme GmbH
Eitnergasse 12
1230 Wien
T: +43 191 493 40
F: +43 191 414 46
contact@tumapumpen.at
www.tumapumpen.at

AUS Australia
Pump Solutions Australasia
Unit 1
7 Bessemer Way
Wangara, WA 6065
P.O. Box 1811
Wangara DC, WA 6947
T: +61 8 9408 1544
F: +61 8 9408 1644
mike@pumpsolutions.com.au
www.pumpsolutions.com.au

Pump Systems Australia
Factory 2
21 London Drive
Bayswater / Melbourne
Victoria 3153
T: +61 397 623 100
F: +61 397 623 188
sales@pumpsystemsaustralia.com.au

B Belgium

Heat transfer pumps / Pompe pour fluid thermique
FLOWMOTION BVBA
Mergelweg 3
1730 Asse
T: +32 2 309 67 13
F: +32 2 309 69 13
info@flowmotion.be
www.flowmotion.be

SPECK - Pompen Belgie N.V.
Bierweg 24
9880 Aalter
T: +32 937 530 39
F: +32 932 500 17
info@speckpompen.be
www.speckpompen.be

BG Bulgaria

EVROTECH OOD
54 A, Manastrikska Str.
1111 Sofia
T: +359 2 971 32 73
F: +359 2 971 22 88
office@evrotech.com
www.evrotech.com

CH Switzerland

Speck Pumpen Subsidiary
Speck Pumpen Industrie GmbH
Bürglenweg 4
8854 Galgenen
T: +41 554 425 094
F: +41 554 425 094
info@speckswitzerland.com
www.speckswitzerland.com

Sales and Service

HänyTec AG
Pumpen-Prozesse-Service
Lättfeld 2
6142 Gettnau
T: +41 56 622 77 33
F: +41 56 622 77 60
info@meyer-armaturen.ch
www.meyer-armaturen.ch

Service

MEYER ARMATUREN PUMPEN GMBH
Rigackerstrasse 19
5610 Wöhlen
T: +41 56 622 77 33
F: +41 56 622 77 60
info@meyer-armaturen.ch

CN China

Speck Pumpen Subsidiary
Jiashan SPECK PUMPS
Systemtechnik Ltd.,
No. 57, Hong Qiao Rd., Huimin Street
No. 4 Economic Developing Zone,
314100 Jiashan Xian,
Zhejiang Province
T: +86 573 847 312 98
F: +86 573 847 312 88
steveche@speck-pumps.cn
www.speck-pumps.cn

CZ Czech Republic

Sigmat spol.s.r.o.
Košmonautů č.p. 1103/6a
77200 Olomouc
T: +420 585 231 070
F: +420 585 227 072
sigmet@sigmet.cz
www.sigmet.cz

DK Denmark

Pumpegruppen a/s
Lundtoftegårdsvæj 95
2800 Lyngby
T: +45 459 371 00
F: +45 459 347 55
info@pumpegruppen.dk
www.pumpegruppen.dk

E Spain

Speck Pumpen Subsidiary

SPECK BOMBAS INDUSTRIALES, S.L.U.
Trafalgar, 53 despacho 6
Centro de Negocios CNAF
46023 Valencia
T: +34 963 811 094
F: +34 963 811 096
M: +34 618 376 241
ventas@speckbombas.es
www.speck.de

F France

Speck Pumpen Subsidiary

Speck Pompes Industries S.A.
Z.I. Parc d'Activités du Ried
4, rue de l'Energie
B.P. 227
67727 Hoerdt Cedex
T: +33 3 88 68 26 60
F: +33 3 88 68 16 86
info@speckpi.fr

GB Great Britain

Speck ABC UK Ltd
AreenA House
Moston Road,
Elworth, Sandbach
Cheshire CW11 3HL
T: +44 844 764 063 2
F: +44 844 764 063 4
admin@speck-abc.com
www.speck-abc.com

GR Greece

SPECK Hellas
Salaminos St. 54
17676 Kallithea
T: +30 210 956 500 6
F: +30 210 957 747 3
grema@speckhellas.gr

I Italy

Centrifugal pumps / Pompe centrifughe
Speck Industries S.r.l.
Via Garibaldi, 53
20010 Canegrate (MI)
T: +39 0331 405 805
M: +39 339 16 59 440
info@speckindustries.it
www.speckindustries.it

Vacuum pumps / Pompe per vuoto

Rio Nanta S.r.l.
Via Mauro Macchi, 42
20124 Milano
T: +39 028 940 642 1
F: +39 028 323 913
M: +39 339 658 781 6
rionanta@rionanta.it
www.rionanta.it

IL Israel

Ambi-Tech
Electronics Engineering Ltd.,
20 Ta'sat:
Industrial Area, Kfar-Saba
PO. Box 50
Kfar-Saba 44425
T: +972 976 775 00
F: +972 976 774 00
Arie.Weiss@PWeiss.d2g.com
www.pweiss.co.il

Small pumps / heat transfer pumps :

Ringel Brothers (1973) Ltd.
134 Hertzl St.
P.O. Box 5148
Tel-Aviv 66555
T: +972 368 255 05
F: +972 368 220 41
M: +972 544 623 095
mringle@ringel-bros.co.il
www.ringel-bros.co.il

IND India

Flux Pumps India Pvt. Ltd.
427/A-2, Gultekdi Industrial Estate
Near Prabhat Printing Press
Pune - 411 047, Maharashtra
T: +91 020 2427 1023
F: +91 020 2427 0689
M: +91 98504 03114
kiran.kadam@flux-pumps.in
www.flux-pumps.in

J Japan

Rodateq, Inc.
Suite 301 Oka Bldg.
2 - 1 - 16 Kyomachibori, Nishiku
550 - 0003 Osaka
T: +81 664 441 940
F: +81 664 449 050
info@rodateq.co.jp
www.rodateq.co.jp

KL Luxembourg

Heat transfer pumps / Pompe pour fluid thermique
FLOWMOTION BVBA
Mergelweg 3
1730 Asse
T: +32 2 309 67 13
F: +32 2 309 69 13
info@flowmotion.be
www.flowmotion.be

MAL Malaysia

Leesonmech
Engineering (M) Sdn. Bhd.
No. 18 Jalan 18, Taman Sri Kluang,
86000 Kluang, Johor
T: +607 777 105 5
F: +607 777 106 6
sales@leesonmech.com
www.leesonmech.com

N Norway

Ingv. Per Gjerdrum A/S
P.O. Box 154
Nye Vakasvei 28
1360 Nesbru
T: +47 667 756 00
F: +47 667 756 01
Pg-pumps@pergjerdrum.no
www.pg-marinegroup.com

NL Netherlands

Centrifugal pumps / Centrifugadelpompen
Speck Pompen Nederland B.V.
Businesspark 7Poort
Stationspoort 10
6902 JK Zevenaar
T: +31 316 331 757
F: +31 316 528 618
info@speck.nl
www.speck.nl

Vacuum pumps / Vacuümpompen

DOVAC B.V.
Meer en Duin 228
2163 LH Lisse
T: +31 252 423 363
F: +31 252 417 946
info@dovac.nl
www.dovac.nl

Heat transfer pumps / Pompe pour fluid thermique

FLOWMOTION BVBA
Mergelweg 3
1730 Asse
T: +32 2 309 67 13
F: +32 2 309 69 13
info@flowmotion.be
www.flowmotion.be

NZ New Zealand

MacEwans Pumping Systems Ltd.
19 Tie Way
North Harbour Industrial Estate
T: +64 941 548 60
F: +64 941 548 68
pumps-ak@macewans.co.nz
www.macewans.co.nz

P Portugal

Ultra Controlo
Projectos Industriais, Lda.
Quinta Lavi - Armação 8
Abrunheira
27 10 - 089 Sintra
P.O. Box 5148
Tel-Aviv 66555
T: +972 368 255 05
F: +972 368 220 41
M: +972 544 623 095
mringle@ringel-bros.co.il
www.ringel-bros.co.il

PL Poland

E.A. Krupins Elzbieta Krupinska
ul. Przymiarki 4A
31-764 Krakow
T: +48 126 455 684
biuro@krupins.krakow.pl
www.krupinski.krakow.pl

RC Taiwan

Speck Pumpen Subsidiary
Speck Pumps Technology Taiwan Ltd.
2FL, no. 153, Sec. 2
Datong Rd., Xizhi District
New Taipei City
T: +886 286 926 220
F: +886 286 926 759
M: +886 936 120 952
speck86@ms32.hinet.net
www.speck-pumps.com.tw

RCH Chile

W & F Ingeniería Y Maquinas S.A.
Felix de Amesti 90, Piso 6
Las Condes, Santiago
T: +56 2 220 629 43
F: +56 2 220 630 39
M: +56 9 828 222 00
rwendler@wyf.cl
www.wyf.cl

RI Indonesia

PT Roda Rollen Indonesia
Kompleks Pertokoan Glodok
Java No. 30
Jl. Hayam Wuruk,
Jakarta - Pusat
Indonesia, 11180
T: +6221 659 922 528
F: +6221 380 595 9
rudy@rodarollenindonesia.com

ROK Corea

J.C. International Inc.
2F, Bileum Bldg. 108,
Yanghwado-Ro, Mapo-Gu,
121-893 Seoul
T: +82 232 628 00
F: +82 232 569 09
jylee@cint.co.kr
www.jcint.co.kr

RO Romania

S.C. Gimsid S.R.L.
Str. Arcului nr. 9, Arp.2
021031 Bucuresti
T: +40 21 2118701
F: +40 21 2102675
gimsid@gimsid.ro
www.gimsid.ro

RUS Russia

LLC Firm Kreoline
Yunost str., 5/3
Moscow 117395
T: +7 495 737 321 4
F: +7 495 769 844 0
M: +7 495 305 198 8
Info@kreoline.ru
www.kreoline.ru

S Sweden

Hugo Tillquist AB
POBox 1120
16422 Kista
T: +46 859 463 200
F: +46 875 136 95
Info@tillquist.com
www.tillquist.com

SK Slovakian Republic

→ Czech Republic (CZ)

SLO Slovenia

→ Czech Republic (CZ)

SGP Singapore

→ Malaysia (MAL)

T Thailand

Speck Pumpen Subsidiary
Pump Systems Flux & Speck Co. Ltd.
181/4 Soi Amnai
Srinakarin Road
Suanluang Bangkok 10250
T: +662 320 256 7
F: +662 322 248 6
thienchai@fluxspeck.com
www.fluxspeck.com

TR Turkey

Speck Pompa
San. ve Tic. Ltd. Sti.
Girne Mah., Küçükalyali Is Merkezi
B Blok No.12 Maltepe
34852 Istanbul
T: +90 216 375 750 5
F: +90 216 375 753 3
M: +(90) 532 293 01 4
speck@speckpompa.com.tr
www.speckpompa.com.tr

USA USA

Speck Pumpen Subsidiary
Speck Industries LP
301 Veterans Blvd
Rutherford
NJ 07070
T: +1 201 569 3114
F: +1 201 569 9607
Info@speckamerica.com
www.speckamerica.com

ZA Rep. South Africa

AQUAPUMP (Pty) Ltd.


Unit 54
APD Industrial park
Kelvin street
Kya Sand

T: +27 11 777 060 600
F: +27 865 864 151
M: +27 824 509 078
cliff@aquapump.co.za
www.aquapump.co.za

SPP Pumps SA (Pty) Ltd.

Cnr Horne St & Brine Ave
Chloorkop Ext 23
Kempton Park
1619 Gauteng
R.S.A.

T: +27 11 393 7177
F: +27 86 513 0255
sales@spppumps.co.za
www.spppumps.co.za

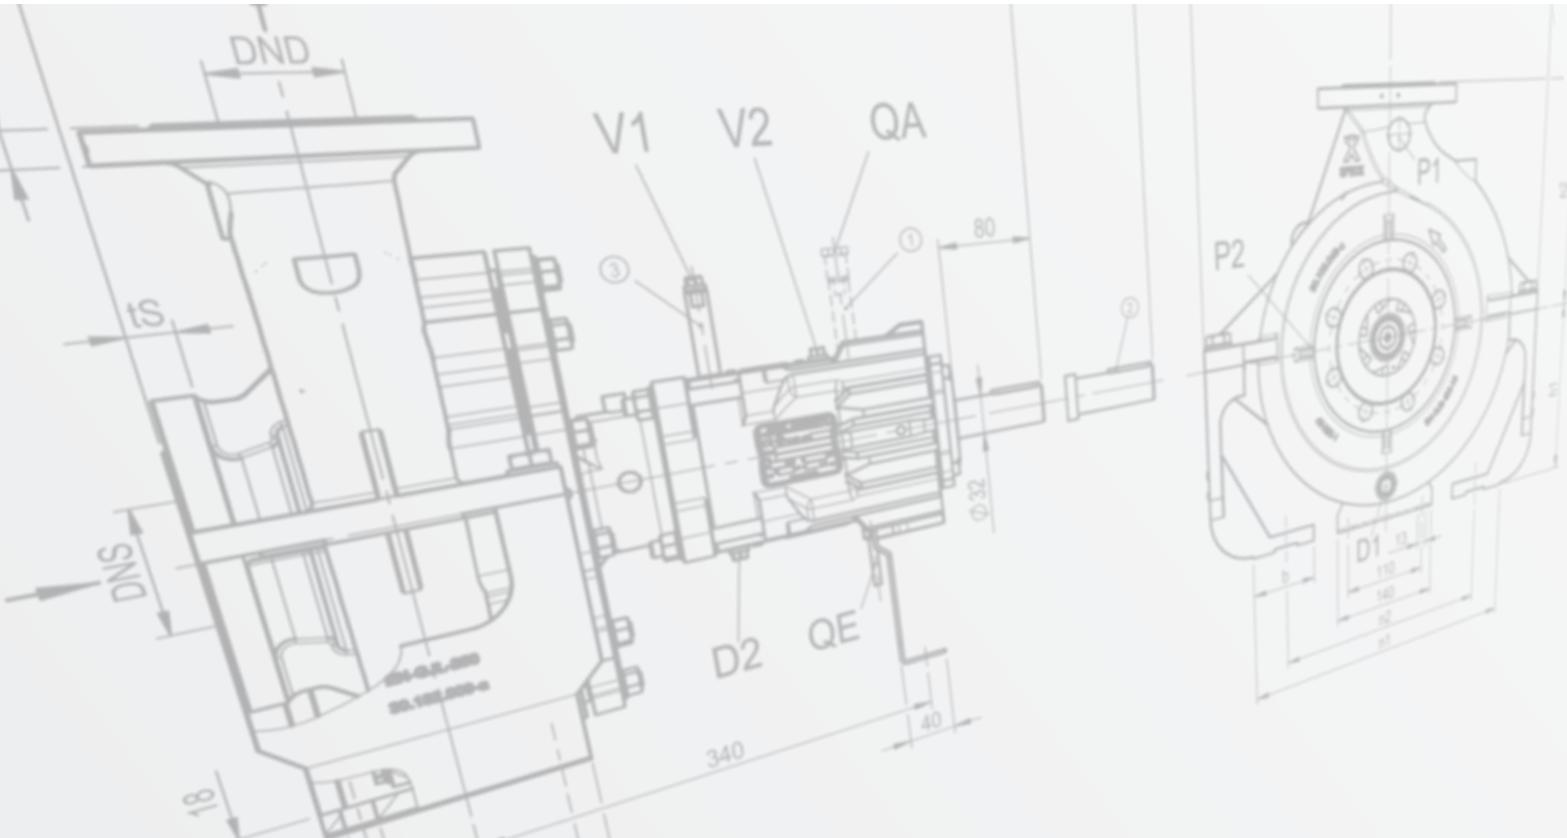

Speck Pumpen Systemtechnik GmbH
Postfach 1453 · 91142 Roth / Germany
Regensburger Ring 6-8 · 91154 Roth / Germany
Tel.: +49 (0) 91 71 809 - 0
Fax: +49 (0) 91 71 809 - 10
info@speck.de
www.speck.de