

Verderflex

Rapide R17S



VERDERFLEX®

Verderflex Rapide R17S Specifications

Standard Speeds	60, 113, 151 & 220 RPM
Control	Inverter Optional
Multi-channel	Up to 4 channels (when factory built)
Voltage	230/400V 50Hz (Single Phase Available to special order)
Installed Motor Power	0.37 kW 50Hz
Protection Class	IP55
Standard Tube Options	Verderprene, Silicone
Tube Size	15.9 x 4.8 mm, 19.0 x 4.8 mm, 25.4 x 4.8 mm
Weight	21 kg

Flow Rates


Tube	RPM	Flow ml/min	Flow l/hr
15.9 x 4.8	60	2600	156
15.9 x 4.8	113	5000	300
15.9 x 4.8	151	6500	390
15.9 x 4.8	220	9400	564
19.0 x 4.8	60	2900	174
19.0 x 4.8	113	5600	336
19.0 x 4.8	151	7400	444
19.0 x 4.8	220	10800	648
25.4 x 4.8	60	4400	264
25.4 x 4.8	113	8300	498
25.4 x 4.8	151	11000	660
25.4 x 4.8	220	17000	1020

Nominal pump speed based on 50Hz operation



Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure, tube material and production tolerances.



Verderflex Rapide R17S

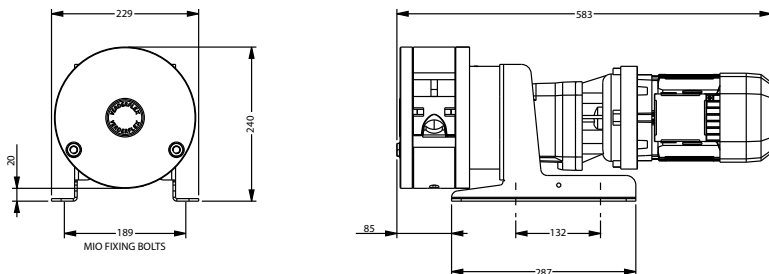

All dimensions are in mm.
All dimensions and weights are for guidance only.

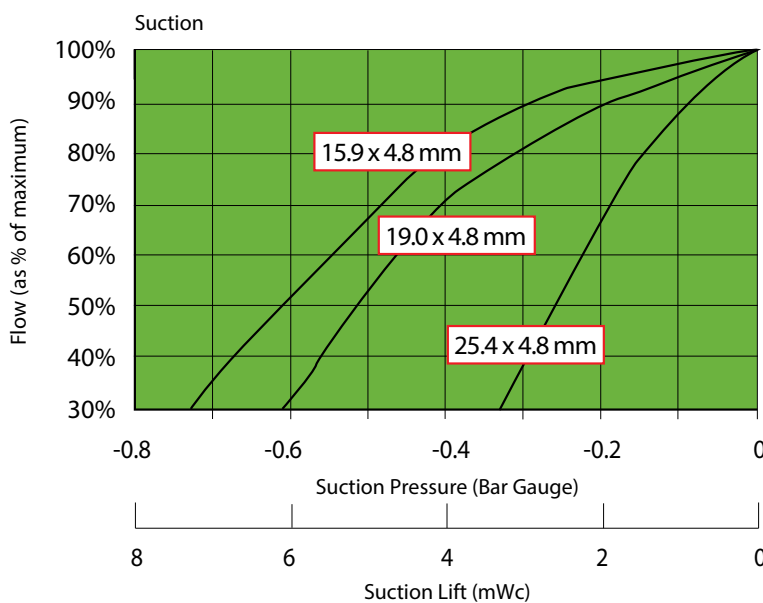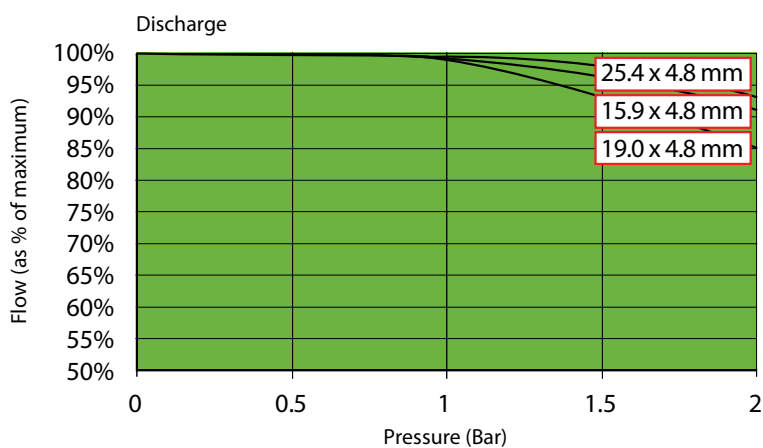

VF_Techno_Rev04_2013_(eu)_Rapide

**Find your local supplier
at www.verderflex.com**

For construction installation and floor mounting drawings
please contact your local authorised Verderflex® distributor.

VERDER
passion for pumps