

Verderflex

Rapide R3



VERDERFLEX®

Verderflex Rapide R3 Specifications	
Standard Speeds	68, 137 and 196 RPM
Control	Inverter Optional
Rotor Assembly	Anodised Aluminium with Two Nylatron® Rollers
Voltage	230/400V 50Hz (Single Phase Available to special order)
Installed Motor Power	0.18 kW 50Hz
Protection Class	IP55
Standard Tube Options	Verderprene, Silicone
Tube Size	6.4 x 3.2 mm, 8.0 x 3.2 mm, 9.6 x 3.2 mm
Weight	5kg

Flow Rates


Tube	RPM	Flow ml/min	Flow l/hr
6.4 x 3.2	68	503	30
6.4 x 3.2	137	992	60
6.4 x 3.2	196	1,413	85
6.4 x 3.2	*270	1,998	120
8.0 x 3.2	68	796	48
8.0 x 3.2	137	1,568	94
8.0 x 3.2	196	2,235	134
8.0 x 3.2	*270	3,159	190
9.6 x 3.2	68	966	58
9.6 x 3.2	137	1,903	114
9.6 x 3.2	196	2,712	163
9.6 x 3.2	*270	3,834	230

Nominal pump speed based on 50Hz operation
 *270 RPM is a non-standard speed



Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure, tube material and production tolerances.



Verderflex Rapide R3

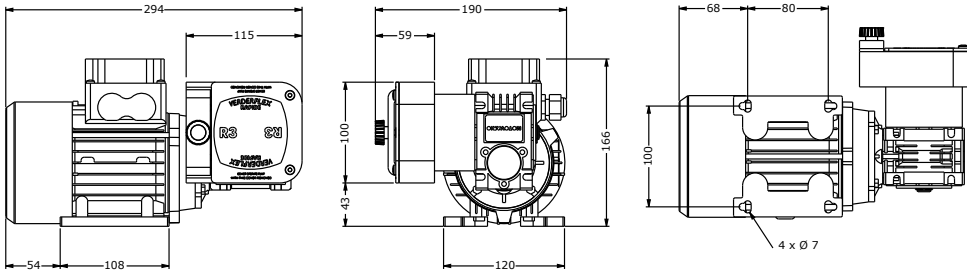

All dimensions are in mm.
All dimensions and weights are for guidance only.

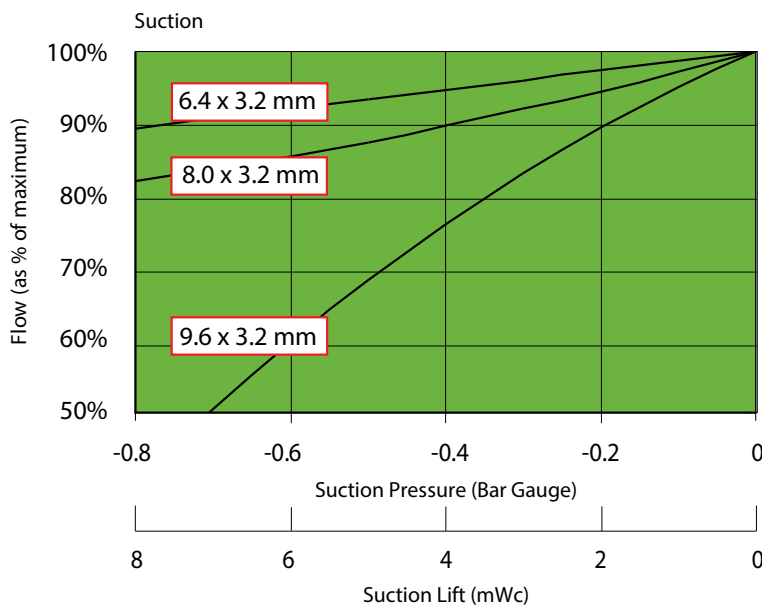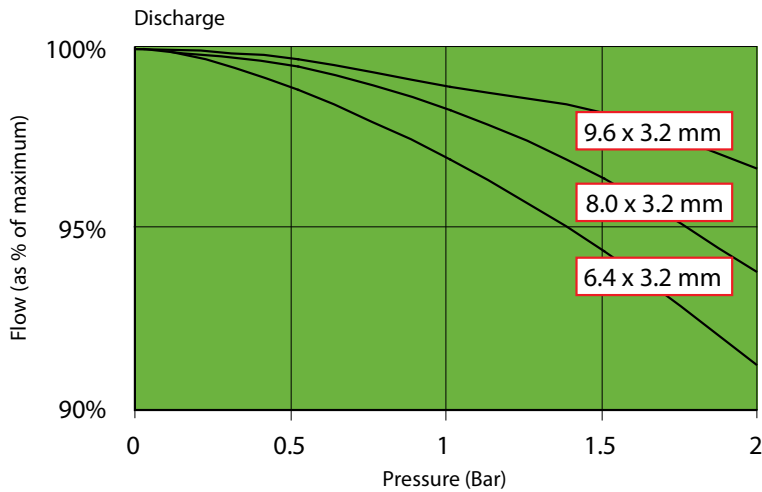

Find your local supplier
at www.verderflex.com

For construction installation and floor mounting drawings
please contact your local authorised Verderflex® distributor.

VERDER
passion for pumps