


Verderflex

Rapide R6

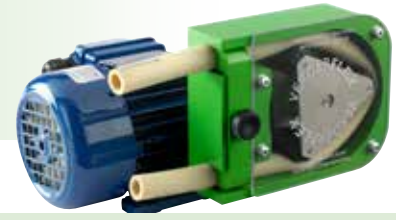

VERDERFLEX®

Verderflex Rapide R6 Specifications

Standard Speeds	68, 137 and 196 RPM
Control	Inverter Optional
Rotor Assembly	Anodised Aluminium with Three Nylatron® Rollers
Voltage	230/400V 50Hz (Single Phase Available to special order)
Installed Motor Power	0.18 kW 50Hz
Protection Class	IP55
Standard Tube Options	Verderprene, Silicone
Tube Size	12.7 x 3.2 mm
Weight	6.5kg

Flow Rates

Tube	RPM	Flow ml/min	Flow l/hr
12.7 x 3.2	68	2,250	135
12.7 x 3.2	*89	3,000	180
12.7 x 3.2	137	4,450	270
12.7 x 3.2	196	6,350	380



Nominal pump speed based on 50Hz operation
*89 RPM is a non-standard speed

Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure, tube material and production tolerances.





Verderflex

Rapide R6

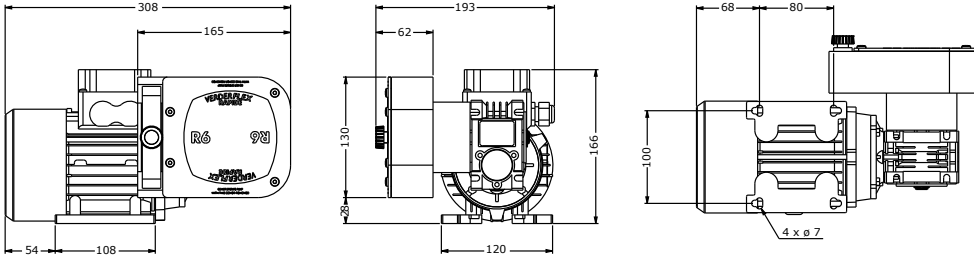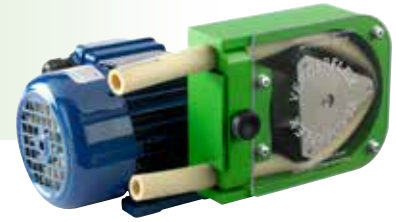

All dimensions are in mm.
All dimensions and weights are for guidance only.

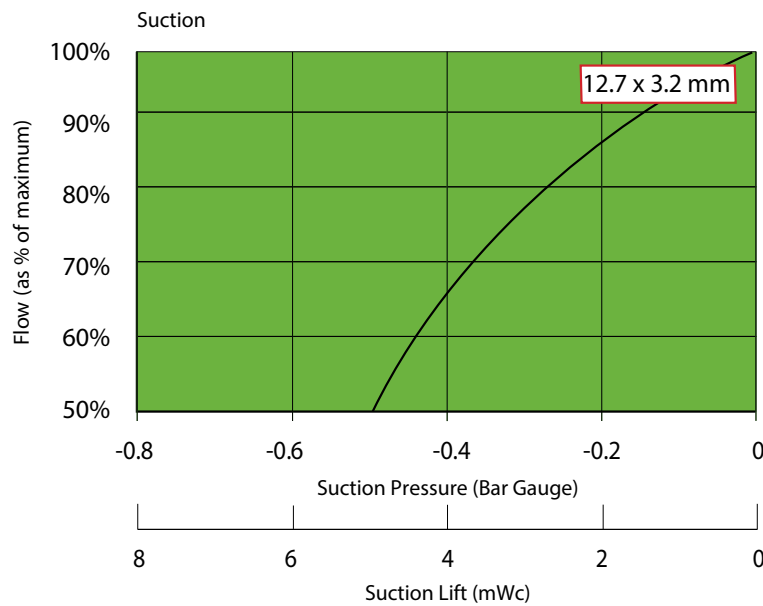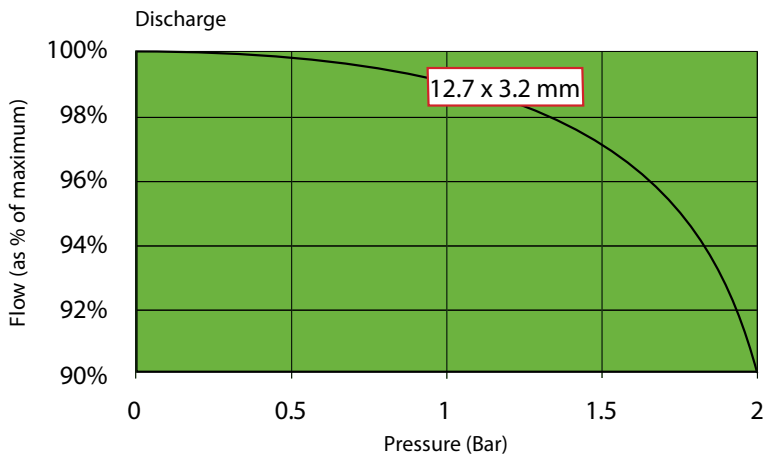

Find your local supplier
at www.verderflex.com

For construction installation and floor mounting drawings
please contact your local authorised Verderflex® distributor.