

Verderflex Rapide R7S



VERDERFLEX®

Verderflex Rapide R7S Specifications

Standard Speeds	60, 113, 151 & 220 RPM
Control	Inverter Optional
Multi-channel	Up to 4 channels (when factory built)
Voltage	230/400V 50Hz (Single Phase Available to special order)
Installed Motor Power	0.37 kW 50Hz
Protection Class	IP55
Standard Tube Options	Verderprene, Silicone
Tube Size	6.4 x 3.2 mm, 9.6 x 3.2 mm, 12.7 x 3.2 mm, 15.9 x 3.2 mm
Weight	18 kg

Flow Rates


Tube	RPM	Flow ml/min	Flow l/hr
6.4 x 3.2	60	330	19.8
6.4 x 3.2	113	730	43.8
6.4 x 3.2	151	910	54.6
6.4 x 3.2	220	1335	80.1
9.6 x 3.2	60	755	45.3
9.6 x 3.2	113	1460	87.6
9.6 x 3.2	151	2000	120
9.6 x 3.2	220	2915	174.9
12.7 x 3.2	60	1335	80.1
12.7 x 3.2	113	1585	95.1
12.7 x 3.2	151	3330	199.8
12.7 x 3.2	220	5080	304.8
15.9 x 3.2	60	1580	94.8
15.9 x 3.2	113	3000	180
15.9 x 3.2	151	4165	249.9
15.9 x 3.2	220	6250	375

Nominal pump speed based on 50Hz operation



Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure, tube material and production tolerances.



Verderflex Rapide R7S

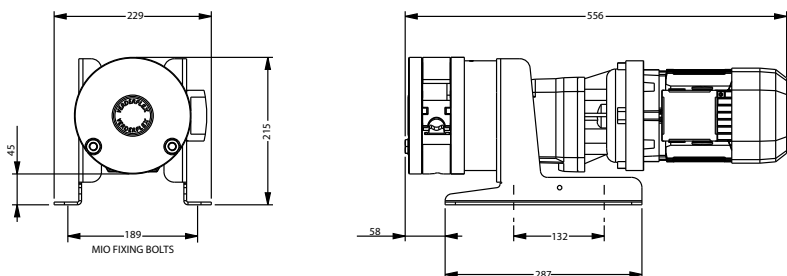

All dimensions are in mm.
All dimensions and weights are for guidance only.

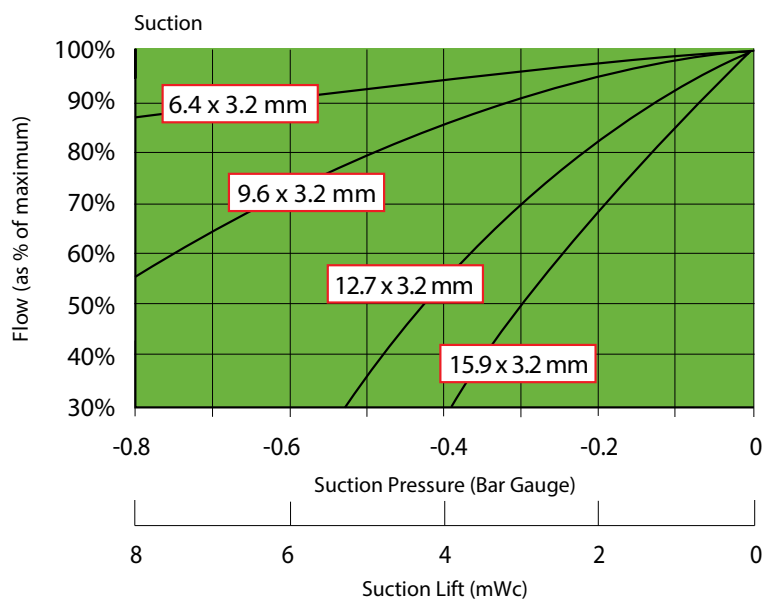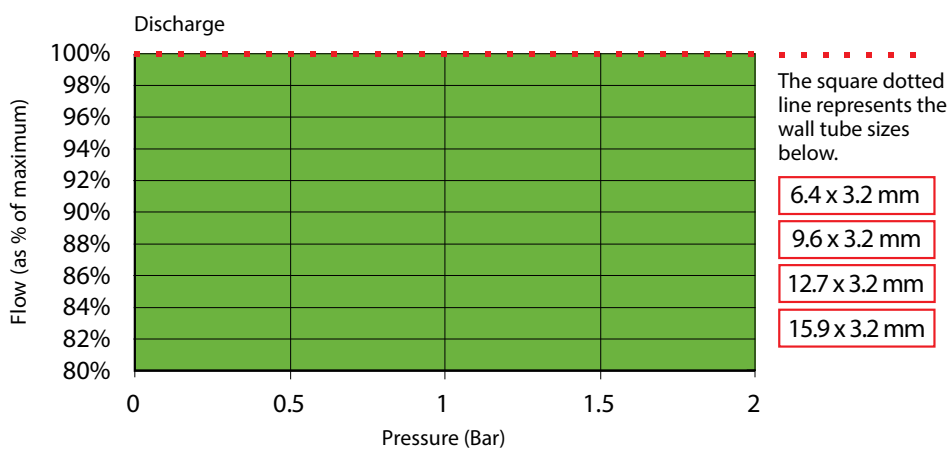

Find your local supplier
at www.verderflex.com

For construction installation and floor mounting drawings
please contact your local authorised Verderflex® distributor.

VERDER
passion for pumps