

# Verderflex

## Rapide R8



VERDERFLEX®

### Verderflex Rapide R8 Specifications

Standard Speeds	68, 137 and 196 RPM
Control	Inverter Optional
Rotor Assembly	Anodised Aluminium with Three Nylatron® Rollers
Voltage	230/400V 50Hz (Single Phase Available to special order)
Installed Motor Power	0.18 kW 50Hz
Protection Class	IP55
Standard Tube Options	Verderprene, Silicone
Tube Size	12.7 x 3.2 mm
Weight	7kg

### Flow Rates


Tube	RPM	Flow ml/min	Flow l/hr
12.7 x 3.2	68	2,800	170
12.7 x 3.2	*89	3,650	220
12.7 x 3.2	137	5,000	330
12.7 x 3.2	196	7,800	470

Nominal pump speed based on 50Hz operation  
\*89 RPM is a non-standard speed



Flows are typical and were measured with water at 20°C with no suction lift or discharge pressure. Actual flows will vary according to suction conditions, discharge pressure, tube material and production tolerances.



# Verderflex Rapide R8

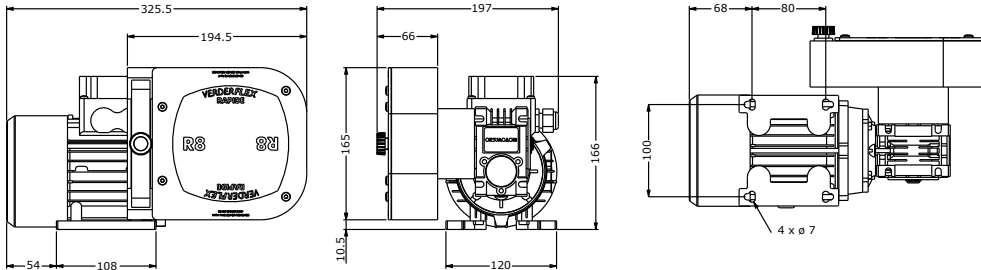

All dimensions are in mm.  
All dimensions and weights are for guidance only.

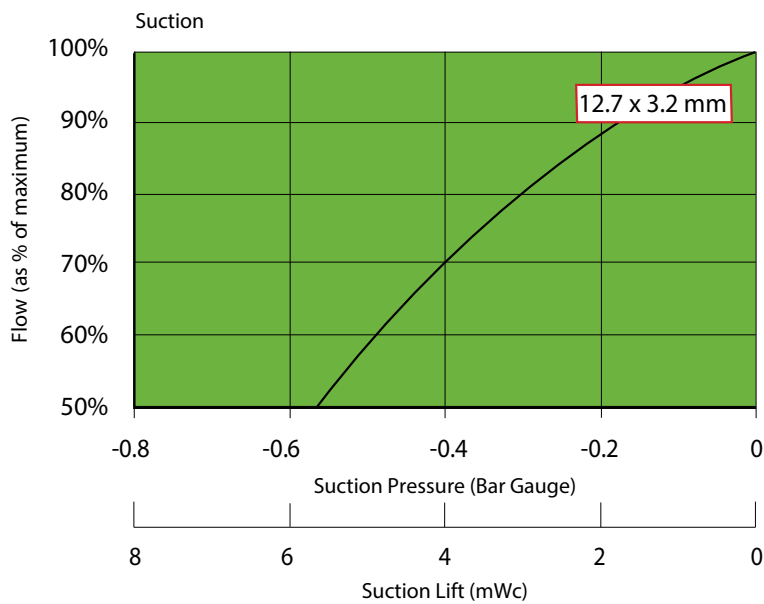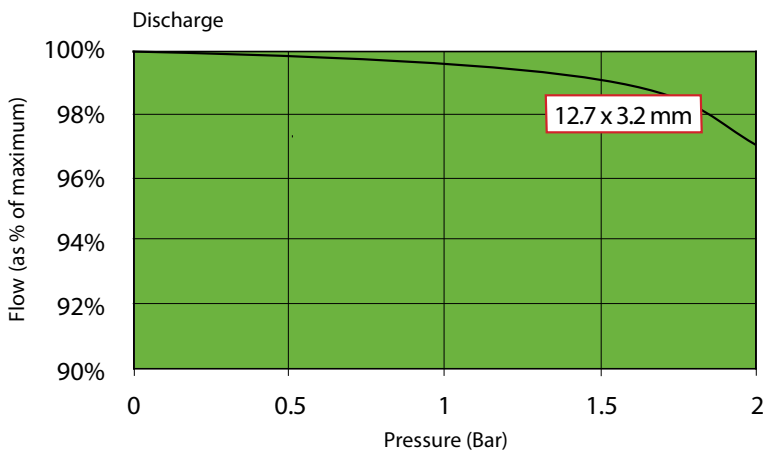

Find your local supplier  
at [www.verderflex.com](http://www.verderflex.com)

For construction installation and floor mounting drawings  
please contact your local authorised Verderflex® distributor.