


NOTE

- MOTORE CON ALBERO BRUNITO MONTATO SU CUSCINETTI A SFERE (15x35x11)
- CONTROLLARE LA FUNZIONALITA' DEL CIRCUITO DI TERRA CON TENSIONE DI 6 V E CORRENTE 25A.

1)BLUED SHAFT ON BALLS BEARING
2)CHECK GROUND CONNECTION WITH 25 AMPS AT 6 VOLTS

84222457000	-----	600 in 380 out	208-240	2.7	60	S2 90'	1650	16µF 370V S2	150°C		174.5	150	64.5	40	72	180	280	230	IP 12
		500 in 310 out	230		50		1400												
MODEL	CUSTOMER CODE	POWER (W)	VOLTAGE (v)	CURRENT (A)	FREQUENCY (Hz)	CYCLE	RPM	CAPACITOR	Thermal protector	INSULATION CLASS	A	B	C	ØD	E	F	G	H	GRADO DI PROTEZIONE IP DEGREE

SCHEMA DI COLLEGAMENTO
CONNECTION DIAGRAM

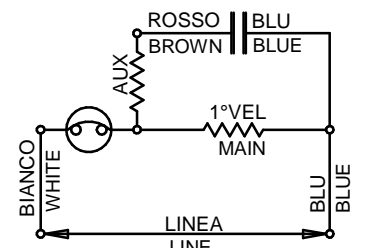

STRICTLY PRIVATE AND CONFIDENTIAL. Any unauthorized use or dissemination to third parties are not allowed without our previous written consent.

TOLL. GENERALI				SCALA		DISEGNATO DA				
UNI EN 22768-m				1:2		FASSINA				
RICAVATO DA				DATA		CONTROLLATO DA				
30360750000				04.05.2020		M. GRECO		SISME S.P.A. OLGiate COMASCO ITALY		
FINITURA				MATERIALE		N° DIS.PROVVISORIO				
-----				-----		-----				
B	MODIFICATO CICLO	11969	FF	06.06.23	DISEGNO D'INGOMBRO				DIS.N°	30 38587 0000
A	EMESSO	11448	FF	04.05.20						
POS.	MODIFICHE	EMISSIONE TECNICA	CONT	DATA						