

Ran[®] 1" (25.4 mm)


Aluminium Body Diaphragm Pump



Technical Specifications

Pump Code	AD25-AS	Pump Housing Material	Aluminium
Max. Flow Rate	150 lpm	Center Section Material	Polypropylene
Max. Pump Speed	200 cpm	Max. Size Pumpable Solids	3 mm
Displacement per cycle	0.75 liter	Max. Suction Lift	8 m (Wet) 4 m (Dry)
Fluid Inlet- Outlet Size	1" NPT	Max. Operating Temperature	80 °C
Air Inlet Size	3/8"	Sound Level	78 dBa (at 5 bar)
Max. Fluid Working Pressure	8 bar	Diaphragm Material	TPE
Max. Air Consumption (at 5 bar)	1 m ³ /min	Check-Valve Material	Acetal
Ratio	1:1	Weight	7 kg

Performance Curves

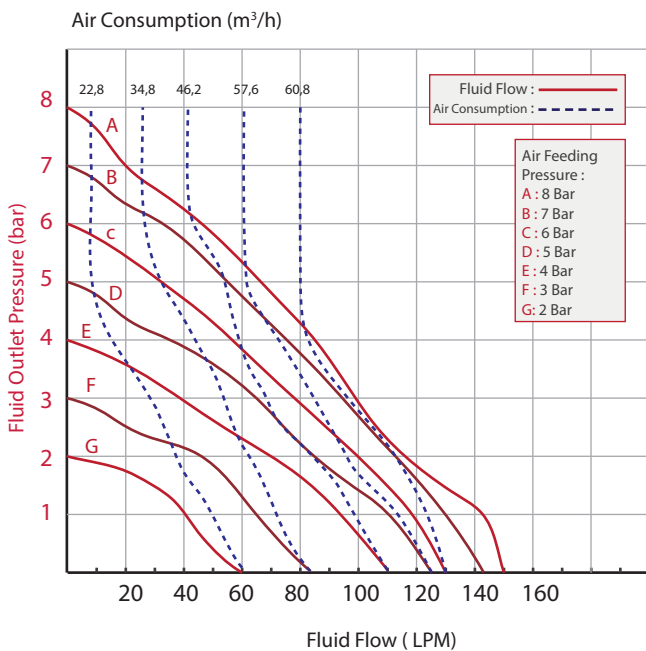

advantage Serisi ile ekonomik çözümler...

Test Conditions: All tests are made with water. Suction hose submerged in the fluid. Muffler not used. By using PTFE diaphragm, capacity decreases by 10%. All the values are shown are approximate and not binding.

Example: To pump 58 lpm against a discharge pressure of 5 bar, requires 7 bar and 46.2m³/h air consumption.

Made in Turkey



Dimensions

All dimensions are in mm.

