


3" Aluminium Body Electromechanical Diaphragm Pump

RAN G80E-AX

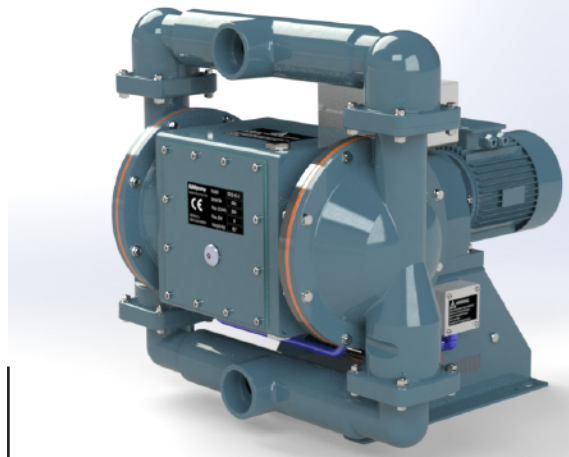


Technical Specifications

MADE IN TURKEY

Max. Flow Rate (continuous operation)	720 lpm
Max. Pump Speed	76 cpm
Fluid per cycle	5.71 liter
Fluid Inlet- Outlet Size	3"
Electrical Feeding Voltage	380v, 50 Hz, 3 Phase
Max. Electrical Consumption	4 kW
Max. Fluid Operating Pressure	4 (0.4 Mpa, 58 Psi)
Motor Type	Standard IP55 Level
Motor Speed	1400 rpm
Gearbox Type	Helical Gear Type

Pump Housing Material	Aluminium
Center Section Material	Sheet Metal
Diaphragm Material	Santoprene/ PTFE/NBR
Max. Size Pumpable Solids	9.5 mm
Max. Suction Lift	6 m
Max. Operating Temperature	104.4 °C
Sound Level (at 4 bar)	76 dBA
Diaphragm Rupture Sensor	Fitted.
Pressure Level Protection Sensor	Fitted.
Weight	320 kg

Performance Curve

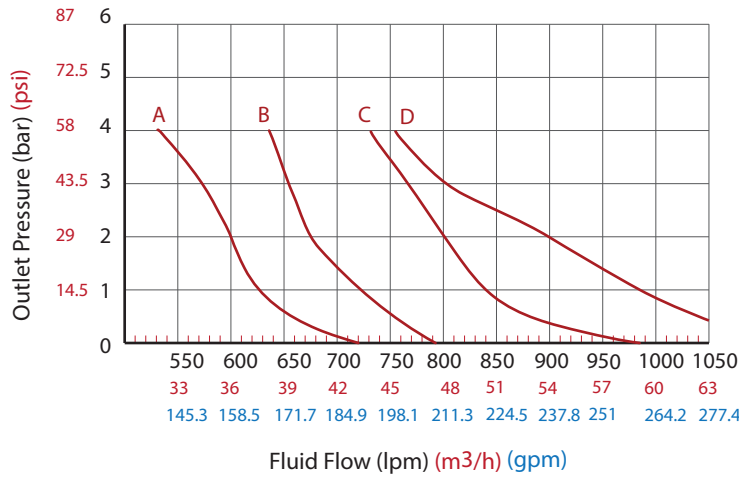

- A 1500 rpm / 50Hz (Continuous Operation)
- B 1800 rpm / 60 Hz
- C 2100 rpm / 70 Hz
- D 2400 rpm / 80 Hz

Test Conditions: All tests are made with using water and Santoprene diaphragm. Suction hose submerged in the fluid. All the values are shown are approximate and not binding.

Dimensions (mm)

